

UTR-40

50 WATTS MAX. • AC & 12V DC OPERATION


- ❖ 3 Mic & 1 Aux input.
- ❖ Cut type bass & treble controls.
- ❖ 3 power source amplifier ; AC mains, 12V DC (Car Battery) and 12V DC dry cell (two Banks of 8x1.5V UM-1 cell each).
- ❖ Extremely portable and ideal for use in remote places without electricity.
- ❖ Low current consumption for long batt. Life.

Power Supply	AC: 220-250V 50/60Hz	Frequency Response	100-12,000Hz + 3dB
	DC: 12V (Car Battery / Dry Cells 8xUM-1)	Signal To Noise Ratio	60dB
Power Output	50W MAX., at 10% THD 40W RMS	Tone Controls	BASS: ±10dB at 100Hz
	at 5% THD 30W RMS		TREBLE: ±10dB at 10KHz
Output Regulation	< 2dB, No load to full load at 1KHz	Outputs	-----
Input Channels	3 x 1MIC 0.6mV/4.7K	Speaker Outputs	4Ω, 8Ω, 16Ω & 100V
	1 x AUX. 100mV/470K	Dimensions	W278XD300XH114mm
	-----	Net Weight	5.850 Kg.


UTR-30E

35 WATTS MAX. • AC & 12V DC OPERATION

- ❖ 3 Mic & 1 Aux input.
- ❖ Cut type tone control.
- ❖ 3 power source amplifier ; AC mains, 12V DC (Car Battery) and 12V DC dry cell (two Banks of 8x1.5V UM-1 cell each).
- ❖ Extremely portable and ideal for use in remote places without electricity.
- ❖ Low current consumption for long batt. Life.

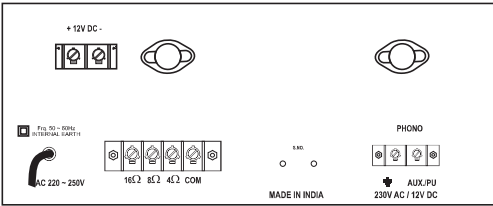

Power Supply	AC: 220-250V 50/60Hz	Frequency Response	100-12,000Hz + 3dB
	DC: 12V (Car Battery / Dry Cells 8xUM-1)	Signal To Noise Ratio	60dB
Power Output	35W MAX., at 10% THD 27W RMS	Tone Controls	TONE: 10dB at 10KHz
	at 5% THD 20W RMS	Speaker Outputs	4Ω, 8Ω, 16Ω
Output Regulation	< 2dB, No load to full load at 1KHz	Dimensions	W247XD260XH116mm
Input Channels	3 x 1MIC 0.6mV/4.7K • 1 x AUX 100mV/470K	Net Weight	4.200 Kg.

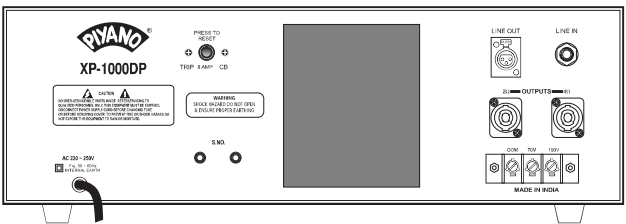


XP-1000DP

1000 WATTS MAX. • AC OPERATION

- ❖ Best use for DJ Programmes.
- ❖ Line input & line output for connecting with other power amplifier
- ❖ Protected against D.C Fault, overload, short circuit and over Temp.
- ❖ Indicator LEDs for Power On, Temp. and D.C Fault conditions have been provided.
- ❖ Built-in USB 2.0, MMC & SD card with digital FM tuner.
- ❖ Provide remote for all function of digital player.



Power Supply	AC: 220-250V 50/60Hz	Tone Controls	BASS: ±10dB at 100Hz
Power Consumption	1400 VA		MID: ±10dB at 1KHz
Power Output	1000W Max.		TREBLE: ±10dB at 10KHz
Output Regulation	< 2dB, No load to full load at 1KHz	Cooling	Force Cooling (120mm AC Fan)
Input Channels	LINE In 100mV / 1V, 1 X MIC -1mV	Protections	2 x 15 Amp INT. Fuse, 8 Amp Reset
Frequency Response	20-15,000Hz + 3dB		Type Circuit Breaker In AC Mains
Signal To Noise Ratio	70dB	Dimensions	W410XD420XH162mm
Speaker Outputs	2Ω, 4Ω, 70V & 100V	Net Weight	22.150 Kg.

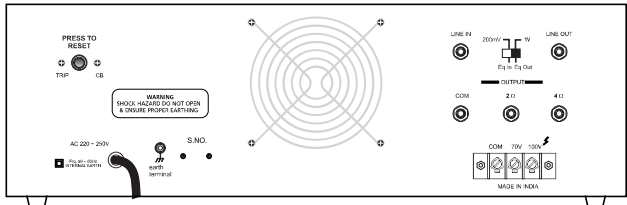

XP-7000DP

825 WATTS MAX. • AC OPERATION

- ❖ Best use for DJ Programmes.
- ❖ Line input & line output for connecting with other power amplifier
- ❖ Protected against D.C Fault, overload, short circuit and over Temp.
- ❖ Indicator LEDs for Power On, Temp. and D.C Fault conditions have been provided.
- ❖ Built-in USB 2.0, MMC & SD card with digital FM tuner.
- ❖ Provide remote for all function of digital player.



Power Supply	AC: 220-250V 50/60Hz	Signal To Noise Ratio	70dB
Power Consumption	1100 VA	Tone Controls	BASS: ±10dB at 100Hz
Power Output	825W MAX., 700W RMS at 10% THD		MID: ±10dB at 1KHz
	640W RMS at 5% THD		TREBLE: ±10dB at 10KHz
Output Regulation	< 2dB, No load to full load at 1KHz	Cooling	Force Cooling
Input Channels	Line 100mV / 47K (Variable)	Speaker Outputs	2Ω, 4Ω, 70V & 100V
Frequency Response	50-15,000Hz + 3dB	Dimensions	W485XD425XH160mm
Protections	10A Fuse, 5A Reset Type Circuit Breaker In AC Mains	Net Weight	20.500 Kg.



SSA-250DP

300 WATTS MAX. • AC & 24V DC OPERATION

- ❖ 6 MIC & 2 AUX. INPUTS.
- ❖ Pre amplifier & line output for connecting to a booster amplifier and for recording the programme.
- ❖ Sound & voice recording.
- ❖ Built-in USB 2.0, MMC & SD card with digital FM tuner.
- ❖ Provide remote for all function of digital player.
- ❖ Instant transfer to DC power (Car Battery). If AC power fails



Power Supply	220-250V 50/60Hz • DC: 24V (2x12V Car Battery)
Power Consumption	AC: 500 VA • DC: 6A
Power Output	300W MAX., at 10% THD 250W RMS at 5%THD 220W RMS
Output Regulation	< 2dB, No load to full load at 1KHz
Input Channels	6 x MIC 0.6mV/4.7K • 2 x AUX. 70mV/470K • 1 x LINE 1V/10K
Tuning Range	FM: 88MHz-108MHz
Digital Player	Mp3 Player with Remote Control (USB, SD and MMC Card Reader)

Frequency Response	50-15,000Hz +3dB
Signal To Noise Ratio	60dB
Tone Controls	BASS: ±10dB at 100Hz TREBLE: ±10dB at 10KHz
Outputs	Preamp 200mV/1K, LINE 1V/1K
Speaker Outputs	4Ω, 8Ω, 70V & 100V
Dimensions	W530XD344XH155mm
Net Weight	16.700 Kg.



SSB-160DP

175 WATTS MAX. • AC & 12V DC OPERATION

- ❖ 6Mic & 2 Aux Inputs.
- ❖ Pre amplifier & Line output for connecting to a booster amplifier and for recording the programme.
- ❖ Built-In USB 2.0, MMC & SD Card with Digital FM Tuner.
- ❖ Provided Remote for all functions.
- ❖ Instant Transfer to DC Power (Car Battery). If AC power Fails.



Power Supply	AC:240 VAC • DC: 12V (Car Battery)
Power Consumption	320 VA
Power Output	160W RMS at 10% THD 120W RMS at 5% THD
Output Regulation	< 2dB, No load to full load at 1KHz
Input Channels	6 x MIC 0.65mV/4.7K, • 2 x AUX. 55mV/470K
Tuning Range	FM: 88MHz - 108MHZ
Digital Player	Mp3 Player with Remote Control (USB, SD and MMC Card Reader)

Frequency Response	50-15,000Hz + 3dB
Signal To Noise Ratio	60dB
Tone Controls	BASS : ±10dB at 100Hz TREBLE : ±10dB at 10KHz
Outputs	Preamp 200mV/600Ω
Speaker Outputs	4Ω, 8Ω, 100V
Dimensions	W465XD330XH140mm
Net Weight	12.250 Kg.



SSB-120DP


150 WATTS MAX. • AC & 12V DC OPERATION

- ❖ 5 Mic & 2 Aux Inputs.
- ❖ Pre amplifier & Line output for connecting to a booster amplifier and for recording the programme.
- ❖ Built-In USB 2.0, MMC & SD Card with Digital FM Tuner.
- ❖ Provided Remote for all functions.
- ❖ Instant Transfer to DC Power (Car Battery). If AC power Fails.



Power Supply	AC: 220-250V 50/60Hz • DC: 12V (Car Battery)
Power Consumption	AC: 240 VA • DC: 10A
Power Output	150W Max., 120W RMS at 10% THD 100W RMS at 5% THD
Output Regulation	< 2dB, No load to full load at 1KHz
Input Channels	5 x MIC0.65mV/4.7K, • 2 x AUX.55mV/470K
Tuning Range	FM: 88MHz - 108MHZ
Digital Player	Mp3 Player with Remote Control (USB, SD and MMC Card Reader)

Frequency Response	50-15,000Hz + 3dB
Signal To Noise Ratio	60dB
Tone Controls	BASS: ±10dB at 100Hz TREBLE: ±10dB at 10KHz
Outputs	Preamp 200mV/600Ω, Line 1V/1K Ω
Speaker Outputs	4Ω, 8Ω, 16Ω, 100V
Dimensions	W410XD330XH140mm
Net Weight	11.250 Kg.

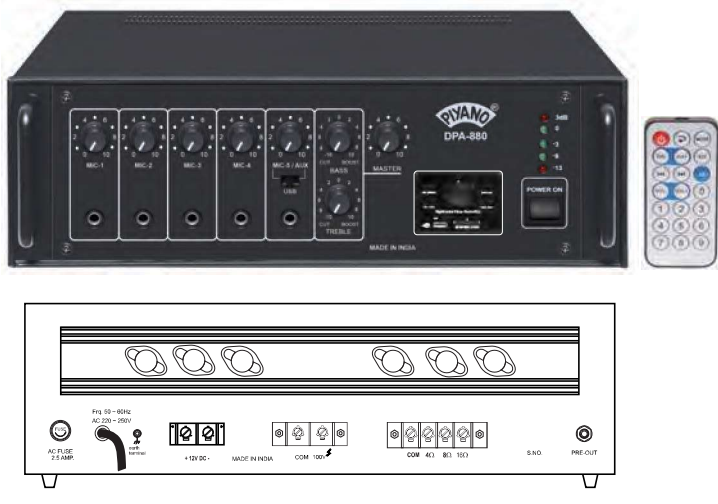

DPA-880

110 WATTS MAX. • AC & 12V DC OPERATION


- ❖ 5 Mic & 1 Aux inputs.
- ❖ Pre amplifier for connecting to a booster amplifier and for recording the programme.
- ❖ Built-In USB 2.0, MMC & SD Card with Digital FM Tuner.
- ❖ Provided Remote for all functions.
- ❖ Instant Transfer to DC Power (Car Battery). If AC power Fails.



Power Supply	AC: 220-250V 50/60Hz • DC: 12V (Car Battery)
Power Consumption	AC: 165 VA • DC: 3A
Power Output	110W Max., 90W RMS at 10% THD 65W RMS at 5% THD
Output Regulation	< 2dB, No load to full load at 1KHz
Input Channels	5 x MIC 0.6mV/4.7K, • 1 x AUX. 60mV/250K
Tuning Range	FM: 88MHz - 108MHZ
Digital Player	Mp3 Player with Remote Control (USB, SD and MMC Card Reader)

Frequency Response	50-15,000Hz + 3dB
Signal To Noise Ratio	60dB
Tone Controls	BASS: ±10dB at 100Hz TREBLE: ±10dB at 10KHz
Outputs	Preamp 200mV/1K
Speaker Outputs	4Ω, 8Ω, 16Ω & 100V
Dimensions	W402XD304XH129mm
Net Weight	9.400 Kg.

PA AMPLIFIERS WITH DIGITAL PLAYER

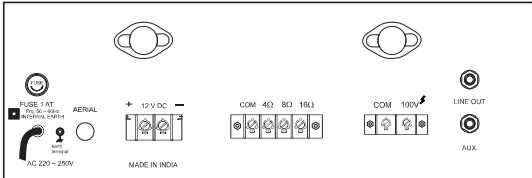

DPA-570FM


75 WATTS MAX. • AC & 12V DC OPERATION

- ❖ 3 Mic & 1 Aux Inputs.
- ❖ Line Output for Connecting to A booster Amplifier.
- ❖ Built-In USB 2.0, MMC & SD Card with Digital FM Tuner.
- ❖ Provided Remote for all function.
- ❖ Instant Transfer to DC Power (Car Battery) if AC power Fails.



Power Supply	AC: 220-250V 50/60Hz • DC: 12V (Car Battery)
Power Consumption	AC: 90 VA • DC: 3.1A
Power Output	75W Max., 50W RMS AT 10% THD
	45W RMS AT 5% THD
Output Regulation	< 2dB, No Load To full Load At 1KHz
Input Channels	3 x MIC 0.6mV/4.7K, • 1 x AUX.100mV/330K
Tuning Range	FM: 88MHz - 108MHZ
Digital Player	Mp3 Player with Remote Control (USB, SD and MMC Card Reader)

Frequency Response	50-15,000Hz +3dB
Signal To Noise Ratio	55dB
Tone Controls	BASS: ±10dB at 100Hz
	TREBLE: ±10dB at 10KHz
Outputs	LINE 400mV/3.5K
Speaker Outputs	4Ω, 8Ω, 16Ω & 100V
Dimensions	W305XD305XH120mm
Net Weight	6.700 Kg.

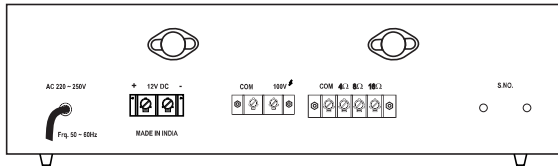

SSB-45DP

55 WATTS MAX. • AC & 12V DC OPERATION

- ❖ 3 Mic & 1 Aux Inputs.
- ❖ Instant transfer to DC power (Car Battery) If AC power fails.



Power Supply	AC: 220-250V 50/60Hz • DC: 12V (Car Battery)
Power Consumption	AC: 110 VA • DC: 2A
Power Output	55W MAX., AT 10% THD 45W RMS
	AT 5% THD 35W RMS
Input Channels	3 x MIC 0.6mV/4.7K • 1 x AUX. 70mV/470K
Tuning Range	FM: 88MHz - 108MHZ
Digital Player	Mp3 Player with Remote Control (USB, SD and MMC Card Reader)

Frequency Response	50-15,000Hz + 3dB
Signal To Noise Ratio	60dB
Tone Controls	BASS: ±10dB at 100Hz
	TREBLE: ±10dB at 10KHz
Speaker Outputs	4Ω, 8Ω, 16Ω & 100V
Dimensions	W322XD302XH108mm
Net Weight	5.970 Kg.



AN ISO 9001 : 2008 Accredited Co.

P.A Megaphones

