



Om Shree Ganesh India (P) Ltd




COMPANY PROFILE

Om Shree Ganesh India Pvt. Ltd. is a professional enterprise, is engaged in the manufacturing of the latest technology based three layers PVC colour coated roofing sheets.

The company currently has its own brand "TETTO Colour" in various types of designs. The quality of TETTO Colour sheets is reliable, has received consistent high praise from the domestic and foreign customers. At the same time the company has a strong R & D capability and a perfect after sales system. So that the customers are more relieved to use our products.

We warmly welcome the buyers at home and abroad to visit our field and take business negotiations.

FEATURES

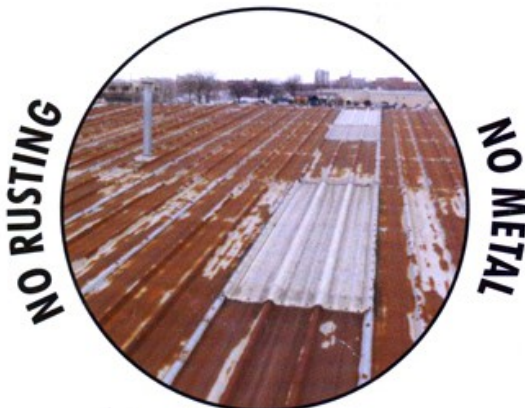

RUSTFREE

SOUND INSULATION



CORROSION RESISTANT




TETTO COLOUR ★
unnati me sajhedaari!

REDUCE COST & TIME



LONG LIFE

FIRE RETARDANT



REDUCE THE FLAMMABILITY & SPREAD OF FIRE

CONTROL 10 TIMES MORE THAN METAL ROOF TEMPERATURE



HEAT INSULATION

100% RECYCLING



RE-SELL

STRENGTH




MORE THAN 4 TIMES OF METAL ROOF




NEW GENERATION UPVC MULTI LAYER CORROSION-RESISTANT HEAT INSULATION SHEETS

Trapezoidal



Plain - TC001
Embossed - TC002

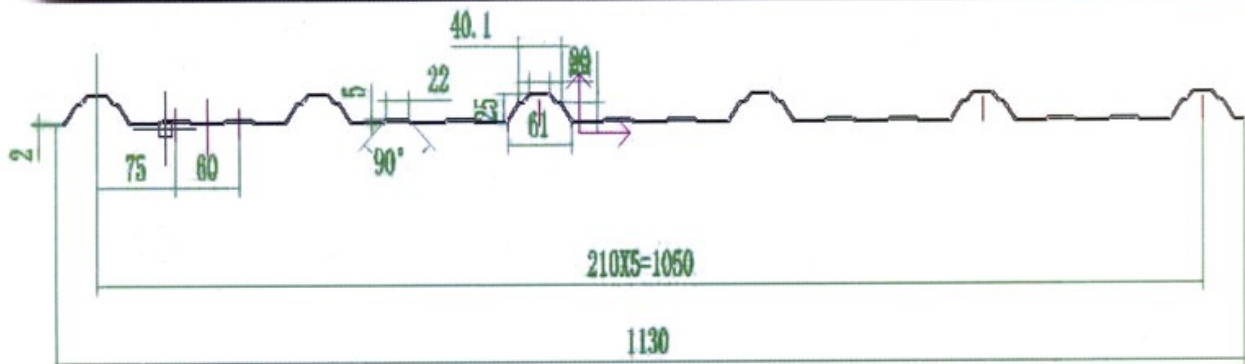

Product specifications

Thickness	1.0, 1.5, 2.0, 2.5 & 3.0mm
Covered width	1050mm
Supplied width	1130mm
Wave height	25mm
Wave width	61mm
Center to center wave width	210mm
Length	As per customer requirement
Colour	Blue/Green/White/Red/Grey (Customized as per customer requirement)

Raw material: Modified PVC



Technology: This product is made from modified PVC.

Applications: Warehouse, factories, cold storage, industrial sheds, Hospitals, Universities, Dairy Farms, Chemical Industries, Hotels, Farm Houses etc.

NEW GENERATION UPVC MULTI LAYER CORROSION-RESISTANT HEAT INSULATION SHEETS

Glazing Tile

Plain -TC006
 Embossed - TC007

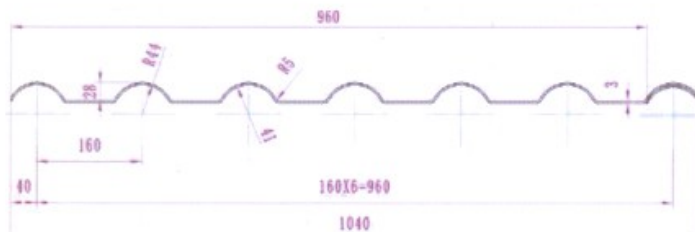

Product specifications

Thickness	2.0, 2.5 & 3.0mm
Covered width	960mm
Supplied width	1040mm
Wave height	28mm
Wave width	80mm
Center to center wave width	160mm
Length	As per customer requirement
Colour	Blue/Green/White/Red/Grey (Customized as per customer requirement)

Raw material: Modified PVC

Technology: This product is made from modified PVC.

Applications: Warehouse, factories, cold storage, industrial sheds, Hospitals, Universities, Dairy Farms, Chemical Industries, Hotels, Farm Houses etc.

ACCESSORIES



TC111

Main ridge tile



TC112

Tilted ridge tile



TC113

Three way ridge



TC114

End cap



TC115

Ridge Tile

INSTALLATION GUIDE

Please use a fine-toothed saw to cut PVC.

Can drill with hand drill or power drill. When drilling, the bottom should be supported to prevent swaying, and the hole diameter should be bigger than screw by 50%. When fixing screws, special rubber amt should be placed under the tile, and the screws should be properly fasten and should not be too tight.

The frame structure uses structural steel purlins, requires neat, parallel and evenly purlins without deforming.



The roof truss structure adopts sectional steel purlin, the purlin is required to be flat without deformation, and two purlins must be in the parallel with uniform span of 700mm.

Sheet Thickness	Span of slopping roof purlin	Span of arch covering purlin
$\leq 1.3\text{mm}$	$\leq 600\text{mm}$	$\leq 800\text{mm}$
$1.3 < 1.8\text{mm}$	$\leq 800\text{mm}$	$\leq 900\text{mm}$
$1.8 < 3.0\text{mm}$	$\leq 900\text{mm}$	$\leq 1000\text{mm}$

BENEFITS

Corrosion resistance: No changes after soaked in acid solution and alkali solution.

Weather resistance: Remarkable improvement of weather resistance due to addition of anti-UV agent.

Good sound insulation: Tests have proved that PVC tiles have excellent noise absorption function when suffered heavy rains and strong winds.

Good fire resistance: Belonging flame retardant material, with fire resistance B1 as tested by national

Heat insulation: Tests have proved that the heat insulation effect is better than colour steel sheet upto 60%.

Insulation: Belonging to insulating material, non-conductive during thundering.

Non conductor of electricity

Ecological clean

High strength: Tensile Strength 38MPa, Flexural Strength 45-55MPa

ISO 9001: 2015 CERTIFIED

Om Shree Ganesh India (P) Ltd

E-61, Bulandshahr Road Industrial Area, Ghaziabad-201009, UP India

Phone: 0120-6531456 | Mobile +91-9810622926 | +91-8920680122

Email: osgipl29@gmail.com, Web: www.omshriganesh.com

