

Industrial Impact Wrenches 3/8" & 1/2" Sq. Drive

New



RY-1161
3/8" Impact Wrench (Butterfly)



I-35
3/8" Heavy Duty Impact Wrench



RY-212 3/8" Impact Wrench
I-45 1/2" Impact Wrench



I-49
1/2" Heavy Duty Impact Wrench



I-313 3/8" Heavy Duty Impact Wrench
I-46 1/2" Heavy Duty Impact Wrench



I-44 A
1/2" Heavy Duty Impact Wrench

New



I-426
1/2" Mini Impact Wrench

New



I-447/Ry-2133
1/2" Composite Impact Wrench



I-311
3/8" Composite Impact Wrench

Technical Specification

Model No.	SQ. Drive	Bolt Size (mm)	Free Speed (rpm)	Max Torque		Overall Length (mm)	Air Consumption (cfm)	Weight (kg)	Air Inlet (inch)
				(ft-lb)	(nm)				
RY-1161	3/8"	13	10,000	75	104	171	4	1.1	1/4"
I-35	3/8"	11	10,000	200	272	140	3	1.2	1/4"
RY-212/1-45	3/8" / 1/2"	15	7000	200	272	160	6	1.42	1/4"
I-313	3/8"	14	10,000	200	272	155	3	1.5	1/4"
I-46	1/2"	16	7200	550	745	192	6	2.6	1/4"
I-49	1/2"	16	7000	400	542	190	8	2.3	1/4"
I-44 A	1/2"	18	7000	550	745	146	8	2.2	1/4"
I-426	1/2"	16	10,000	500	678	122	4	1.56	1/4"
I-447/Ry-2133	1/2"	18	7500	600	814	170	4.2	2.06	1/4"
I-311	3/8"	15	10,000	320	435	160	3	1.20	1/4"

Industrial Impact Wrenches 3/4" ,1" & 1½" Square Drive & Air Ratchets



I-69
3/4" Heavy Duty Impact Wrench



I-601
3/4" Impact Wrench (Twin Hammer)



I-604
3/4" Heavy Duty Impact Wrench



I-86 P
1" Heavy Duty Impact Wrench



I-8083/I-8083L
1" Heavy Duty Impact Wrench



I-8082 P
1" Heavy Duty Impact Wrench



I-89
1½" Heavy Duty Impact Wrench



R-50 1/4" Ratchet
R-52 3/8" Ratchet
R-53 1/2" Ratchet



R-54
1/2" Heavy Duty Ratchet Wrench

Technical Specification

Model No.	SQ. Drive	Bolt Size (mm)	Free Speed (rpm)	Max Torque		Overall Length (mm)	Air Consumption (cfm)	Weight (kgs)	Air Inlet (inch)
				(ft-lb)	(Nm)				
I-69	3/4"	31.8	4500	850	1152	245	10	4.8	1/4"
I-601	3/4"	38	5500	1100	1492	216	12	5.40	3/8"
I-604	3/4"	25	4,000	1,200	1627	240	10	3.80	1/4"
I-86 P	1"	38	4,500	1,400	1898	260	11	5.8	1/4"
I-8083	1"	45	4,000	1,800	2441	536	12	10.6	1/2"
I-8082P	1"	42	3,500	1,600	2170	300	12	8.9	1/2"
I-89	1½"	55	3,000	3,000	4068	431	34	19	1/2"
R-50	1/4"	8	250	30	40	191	4	0.60	1/4"
R-52/R-53	3/8"/1/2"	10/13	160	50	68	254	4	1.1	1/4"
R-54	1/2"	13	150	90	122	365	6	2.0	1/4"

Industrial Screw Drivers (Double Hammer, Clutch, Auto Shut Type)



RY-600 K 3/8" Driver Wrench
RY-600 1/4" Industrial Screw Driver



RY-8H
H. Duty Impact Screw Driver



RY-6 SLD 1/4" Industrial Screw Driver
RY-6SL-3/8" Driver Wrench



SD - 52
Angle Adj. Clutch Screw Driver



SD 62 A
Impact Screw Driver



SD - 69
H.D Impact Screw Driver



SD - 67 / 67W
Impact Driver Wrench



SD - 80 / 81
Pistol Adj. Clutch Screw Driver



SD 50
Adjustable Clutch Screw Driver



SD 4500
Adjustable Clutch Screw Driver



SD - 56 / SD - 57
Adjustable Clutch Screw Driver



RY - 501
Auto Shut, Low Noise, Screw Driver

Technical Specification

Model No.	Hex Shank / Square (Inch)	Capacity (mm)	Free Speed (rpm)	Max Torque (nm)	Overall Length (mm)	Air Consumption (cfm)	Weight (kgs)	Air Inlet (inch)
RY-600 / RY-600K	1/4 & 3/8"	6-8	7,000	165	200	6	0.96	1/4"
RY-8H	1/4 & 3/8"	8	8,500	220	210	6	1.30	1/4"
RY-6SLD	1/4 & 3/8"	6-8	8,000	165	175	6	1.20	1/4"
SD - 52	1/4"	5	1,600	2.3 - 5.2	230	5	0.90	1/4"
SD - 62A	1/4"	4-5	13,000	35	155	2	0.80	1/4"
SD-69	1/4"	6-8	7,000	200	230	6	1.10	1/4"
SD-67/SD67W	1/4" & 3/8"	6-7	7,000	46	260	6	1.50	1/4"
SD-80	1/4"	6	1,800	5 - 13	178	5	1.10	1/4"
SD-81	1/4"	8	800	5 - 17	216	5	1.23	1/4"
SD-50 A	1/4"	4	1,500	1 - 3.5	210	4	0.60	1/4"
SD-4500	1/4"	5	2,200	2 - 5	235	4	0.80	1/4"
SD-56	1/4"	6	1800	5 - 13	241	5	1.50	1/4"
SD-57	1/4"	8	800	5 - 17	267	5	1.50	1/4"
RY-501	1/4"	4	1,000	0.4 - 2.0	230	3	0.70	1/4"

Industrial Angle Grinders



RY - 170 L / RY - 182
1" Angle Grinder



DG-392R
2" Angle Grinder



RY - 4S / RY - 4SA
4" Angle Grinder



AG 36G/AG - 37G
4 1/2" Angle Grinder



RY - 5S
5" Angle Grinder



AG 44G / AG - 45 G
4 1/2" Heavy Duty Angle Grinder



AG - 41 G
7" Angle Grinder



AG - 47 G
7" Heavy Duty Angle Grinder



VG-44
7" Heavy Duty Vertical Grinder

Technical Specifications

Model No.	Capacity/Collet (mm)	Free Speed (rpm)	Overall Length (mm)	Air Consumption (cfm)	Weight (kgs)	Air Inlet (inch)
RY-170 L	25	23,000	135	4	0.30	1/4"
RY-182	25	24,000	140	4	0.15	1/4"
DG-392R	50	15,000	160	6	1.0	1/4"
RY-4S	100	12,000	188	8	1.20	1/4"
RY-4SA (Lever Type)	100	12,000	190	8	1.30	1/4"
AG-36 G	100	11,000	230	6	1.8	1/4"
AG-37 G	125	11,000	230	6	1.83	1/4"
RY-5S	125	11,000	230	8	1.83	1/4"
AG-44 G	100	10,900	255	18	1.6	1/4"
AG-45 G	125	10,900	255	18	1.6	1/4"
AG-41 G	175	7,000	302	9	3.3	3/8"
AG-47 (G)	180	7,600	315	24	3.1	3/8"
VG-44	180	7,000	340	24	3.9	1/2"

Industrial Die Grinders

DIY



RY - 317
1/4" Die Grinder



DG - 30 (M)
(Die Grinder)



DG-32 (M)
Heavy Duty Die Grinder



RY-4D
Die Grinder



DG - 33M 1" Ext. Die Grinder
DG - 34M 3" Ext. Die Grinder



DG-311(R)
Composite Body Air Die Grinder



DG 36 M / RY318
Angle Die Grinder



DG-394
Heavy Duty Steel Body Die Grinder



DG-GS38(N)
Heavy Duty Die Grinder

Technical Specification

Model No.	Free Speed (rpm)	Collet Size (mm)	Overall Length (mm)	Avg. Air Consumption (cfm)	Weight (kgs)	Air Inlet (Inch)
RY-317	22,000	6	175	5	0.620	1/4"
DG-30 (M)	25,000	6	160	6	0.450	1/4"
DG-32 (M)	18,000	6	184	8	0.700	1/4"
RY-4D/4DA	24,000	6	184	6	0.68	1/4"
DG-33 (M)	25,000	6	200	6	0.600	1/4"
DG 34 (M)	25,000	6	235	6	0.650	1/4"
DG 311 (R)	3,500	6	200	6	0.8	1/4"
DG-36 (M)	18,000	6	165	6	0.600	1/4"
RY-318	18,000	6	155	5	0.49	1/4"
DG-394	24,000	6	179	6	0.5	1/4"
DG-GS38N	25,000	6	172	10	0.600	1/4"

Micro Die Grinders & Sanders



MG - 80 / RY-170
3mm Micro Die Grinder

DIY



RY - 316 / RY - 316 B
3mm Micro Die Grinder Kit



MG - 75 / RY-160
3mm Micro Die Grinder



RY - 135
3&86 mm Die Grinder



MG - 01
Micro Die Grinder

NEW



RY-180 / RY-181
3mm Micro Die Grinder



DG - 37
2" Air Angle Sender

DIY



S-12
5" High Speed Sander



S-17
Air Palm Sander

Technical Specifications

Model No.	Free Speed (rpm)	Collet Size (mm)	Overall Length (mm)	Avg. Air Cons. (cfm)	Weight (kgs)	Air Inlet (Inch)
MG-80 / RY-170	70,000	3	132	4	0.080	1/4"
RY-316 B	56,000	3	150	1.5	0.21	1/4"
MG-75	82,000	3	156	5.3	0.22	1/4"
RY-160	60,000	3	155	1.5	0.22	1/4"
RY-135	35,000	6/3	175	4	0.350	1/4"
MG-01	65,000	3	160	6	0.110	1/4"
RY-180	43,000	3	150	4	0.14	1/4"
RY-181	24,000	3	140	4	0.15	1/4"
DG-37	15,000	2"/3"	165	6	0.600	1/4"
S-12	18,000	125	191	4	1.0	1/4"
S-17	20,000	100X110	127	1	0.5	1/4"

Industrial Sanders & Polishers



BS-9 Belt Sander 10 × 330 mm
BS-10 Belt Sander 20 × 520 mm



S-113
Non Vacuum Tri Sander



S-116, 3" Non Vacuum
Random Ordital Sander




S-25
Professional Orbital Sander



RY 0319, 5/16" Non Vacuuming D/A Sander
RY 0319 A, 5/16" Self Vacuuming D/A Sander



S-45, 5/16" Self Vacuuming D/A Sander
S-45 A, 5/16" Non Vacuuming D/A Sander



S-71
3" Mini Polisher



S-70(S) 7" Vertical Sander
S-70 7" Vertical Polisher



S-73 7" Angle Sander
S-74 7" Angle Polisher

Technical Specification

Model No.	Free Speed (rpm)	Pad Size (mm)	Overall Length (mm)	Avg. Air Consumption (cfm)	Weight (kgs)	Air Inlet (Inch)
BS-09	16,000	10 × 330	260	6	0.9	1/4"
BS-10	16,000	20 × 520	340	6	1.2	1/4"
S-113	10,000	100X75	140	6	0.6	1/4"
S-116	10,000	75	136	6	0.65	1/4"
S-25	7,000	93 × 176	210	4	2.0	1/4"
RY-0319/0319A	7,000	125/150	203	6	1.10	1/4"
S-45/S45A	8,000	125/150	203	6	1.02	1/4"
S-71	2,000	75	110	4	0.73	1/4"
S-70 S / S-70	4,000/2,000	178	190	6	2.5	1/4"
S-73/ S-74	4,500/2,500	178	330	12	2.9	1/4"

Air Riveting Tools



R - 15
Hydraulic Riveter



RY - 221
Hydraulic Riveter



R - 13 BV
Oil Less Riveter (Vaccum Type)



R - 6100 V
Hydraulic Riveter (Vaccum Type)
(For SS & Alloy Rivet)



R - 6103 V
H. Duty Hydraulic Riveter
(For SS & Alloy Rivets)



RH - 204
Reveting Hammer



H - 30 R 250 mm Air Hammer
H - 20 R 190 mm Air Hammer
H - 10 R 150 mm Air Hammer



OPPS 12 - 01
Hydraulic Riveting Nut Tool
Capacity : 3-12 mm



OP - PS - 6 upto 06mm Pull Setter
OP - PS - 10 upto 10mm Pull Setter
OP - PS - 12 upto 12mm Pull Setter

Technical Specification

Model No.	Rivet Capacity (Inch/mm)	Traction Power (Kgs)	Stroke Length (mm)	Air Consumption (cfm)	Weight (kg)	Air Inlet (inch.)
R-15	3/16", 5/32", 1/8", 3/32"	720	14	4	1.5	1/4"
RY-221	3/16", 5/32", 1/8", 3/32"	1045	17	4	1.5	1/4"
R-13 BV	3/16", 5/32", 1/8", 3/32"	820	18	4	1.4	1/4"
R-6100 V	3/16", 5/32", 1/8", 3/32"	1000	16	4	1.80	1/4"
R-6103 V	1/4", 3/16", 5/32", 1/8"	1700	23	4.5	2.4	1/4"
OP-PS-12-01	M-3 - M-12	2176	7	4.5	2.5	1/4"

Model No.	Chisel Shank (In)	Piston Stroke (mm)	BPM	Overall length (mm)	Air Consumption (cfm)	Weight (kgs)	Air Inlet
H-10 (R)	0.401	41	4,500	133	5	1.5	1/4"
H-20 (R)	0.401	66	3,000	178	5.5	2.0	1/4"
H-30 (R)	0.401	92	2,200	216	6	2.2	1/4"
RH-204	0.401	73	2,200	185	6	1.30	1/4"

Model No.	Capacity (mm)	Free Speed (rpm)	Weight (kg)	Air Consumption (cfm)	Air Hose Size	Air Inlet
OP-PS-06	M3-M6	600	1.2	2	3/8	1/4"
OP-PS-10	M6-M10	450	1.8	2	3/8	1/4"
OP-PS-12	M6-M12	100	1.92	2	3/8	1/4"

Air Drills, Tapping M/C, Needle Scaler, Flux Chipper, Chipping Hammer



D-31 3/8" Reversible Drill
D-41 1/2" Reversible Drill



D-36
3/8" Reversible Angle Drill



D-38 / RY 311
3/8" Straight Drill



D - 4400
Air Tapping Drill



SD - 94 WS
Air Tapping Wrench



NS - 505
Air Needle Scaler



FC - 501
Air Flux Chipper



FC - 502
Air Flux Chipper



CH - 101/CH - 104
Air Chipping / Riveting Hammer

Technical Specification

Model No.	Free Speed (rpm)	Drilling Cap	Overall Length (mm)	Air Inlet	Air Consumption (cfm)	Weight (kgs)
D-31	1,800	3/8"	165	1/4"	6	0.9
D-41	800	1/2"	180	1/4"	6	1.13
D-36	1,800	3/8"	216	1/4"	6	1.10
D-38	2,600	3/8"	216	1/4"	6	0.90

Model No.	Free Speed (rpm)	Tapping Cap (mm)		Overall Length (mm)	Air Consumption (cfm)	Weight (kgs)	Air Inlet (Inch)
		Aluminium	Steel				
D-4400	700	12	8	205	6	1.62	1/4"
SD-94 WS	2500	10	6	225	4	1.36	1/4"

Model No.	No. of Needle / Piston (mm)	BPM	Overall Length (mm)	Air Inlet	Air Consumption (cfm)	Weight (kgs)
NS-505	2 × 29 Pcs	3,000	250	1/4"	12	2.8
FC-501	23.5 × 20 × 73	3,000	375	1/4"	12	2.6
FC-502	23.5 × 20 × 73	3,000	250	1/4"	12	2.6

Model No.	Piston Dia. (mm)	Piston Stroke (mm)	Speed (bpm)	Overall Length (mm)	Average Air Consumption (cfm)	Weight kg	Air Inlet
CH-101	29	25	2820	308	10	5.5	3/8"
CH-104	29	102	1500	410	12	7	3/8"

Industrial Body Saw, Air Knife, Metal Shear & Air Nipper



B - 12
Air Body Saw



B - 13
Air Body Saw / Filer



B - 14 Air Knife
Cutting Cap 3mm. RPM - 20000



B - 21
Air Metal Shear



B - 26
Air Nibbler (Pull Type)



B - 27
Air Cut Off Tool 3" RPM - 18000



B-72 / B-73 Air Nipper
(For PCB Lead Cutting)



B - 909
Engraving Pen



B - 54
Spot Drill Machine

Technical Specification

Model No.	Cutting Capacity (mm)		Stroke Length (mm)	BPM	Air Consumption (cfm)	Weight (kg)
	Steel	Aluminium				
B-12	2	3	9.5	10,000	4	0.90
B-13	2	3	9.5	5,000	4	0.90

Model No.	Cutting Capacity (mm)		Free Speed RPM	Avg. Air Consumption	Weight (kg)
	Steel	Aluminium			
B-26	1.4	1.8	3,500	6	1.0
B-21	1.2	1.4	2,500	6	1.10


Model No.	Cutting Capacity (mm)			Power (Kg-Cm ³)	Air Consumption L/Stroke	Weight (kg.)
	Copper	Steel	Plastic			
B-72	1	0.5	2	40	0.06	0.13
B-73	1.5	1	4	60	0.11	0.2

Model No.	Free Speed (rpm)	Drilling Cap (mm)	Overall Length (mm)	Air Inlet	Air Consumption (cfm)	Weight (kgs)
B-54	1,800	6.5 & 8 mm bit	250	1/4"	8	1.2

Pneumatic Carton Packers & Staplers



CS - 3519 / CS - 3522 / CS - 3218
Pneumatic Carton Stapler

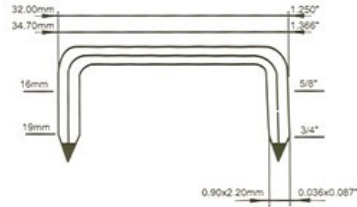


MODEL NO.

CS-3218	Application : Corogated Box Packing			
&	1) Efficient			
CS-3519	2) Saving Energy			
&	3) Easy to Operate & Hand Carry			
CS-35-22	4) The Tightness & Penetration Depth is adjustable			
	5) The return of Clinching anvil is automatic			
Length : 370 mm	Model	Staple	Staple	
Width : 115 mm		Crown	Length	
Height : 220 mm	CS 3519	35	15-19	
Weight : 2.15 Kgs	CS 3218	32	15-18	
Load Capacity : 100 Staples	CS 35 22	35	15-22	




HS - 3519 / HS - 3522 / HS - 3218
Hand Drive Carton Stapler

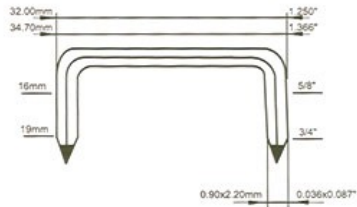

HS-3519	Application : Corogated Box Packing			
HS-3522	1) Efficient			
HS-3218	2) Saving Energy			
	3) Easy to Operate & Hand Carry			
	4) The Tightness & Penetration Depth is adjustable			
	5) The return of Clinching anvil is automatic			
Length : 400 mm	Model	Staple	Staple	
Width : 115 mm		Crown	Length	
Height : 290 mm	HS 3519	35	15-19	
Weight : 1.7 Kgs	HS 3522	35	15-22	
Load Capacity : 100 Staples	HS 3218	32	15-18	




AN - 8016
Pneumatic Stapler




AN-80/16	Application Fasteners Size / Tool Specification
Application : Furniture, Wood Box & Shoe Manf,	
Crown : 12.8 /	Weight : 0.96 kg
Width : 0.95	Height : 147 mm
Thickness : 0.65	Width : 42 mm
Gauge : (21)	Length : 230 mm
Length : 6 - 16 mm	




AN - 422 J
Pneumatic Stapler



AN-422J	Application Fasteners Size / Tool Specification
Application : Furniture, Wood Box & Shoe Manf,	
Crown : 5.2	Weight : 2.65 kg
Width : 1.20	Height : 295 mm
Thickness : 0.60	Width : 87 mm
Gauge : (20)	Length : 380 mm
Length : 13 - 22 mm	Load Capacity : 150 Nails

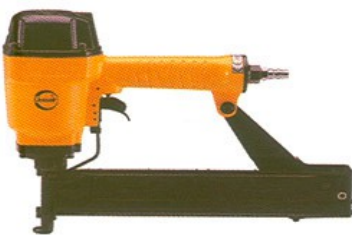

AN - 16851
Heavy Duty Pneumatic Stapler




AN-16851	Application Fasteners Size / Tool Specification
Application : Creates, Pallets, Woodens Frames etc.	
Crown : 11.1	Weight : 1.5 kg
Width : 1.60	Height : 177 mm
Thickness : 1.40	Width : 51 mm
Gauge : (16)	Length : 240 mm
Length : 25 - 50 mm	

Pneumatic Braders Headless Pinner & Coil Nailers



FS - 2150
2-in-1 Nailer For Brad & Staple




MODEL NO.

FS-2150	Application : Staircases, Paneling, Interior Finish & Trimm, Customs Cabinets, Mouldings & Crafts		
Tools Specification	Nails (mm)	Staples (mm)	
Weight : 2.64 lbs	L : 15-50	L : 15-50	
Height : 190 mm	SW : 1.25	SW : 1.25	
Width : 50 mm	ST : 1	ST : 1	
Length : 200 mm	Gauge : 18	Gauge : 18	
Air Pressure : 60-100 Psi		Crown : 5.8	
Nail Capacity : 100 Pcs.			
<i>*L - Lenght, SW - Shank Width, ST - Shank Thickness</i>			



F - 1850 L / F - 1832
18 G Wire Finish Nailer




MODEL NO.

F-1850 & F-1832	Application : Staircases, Paneling, Interior Finish & Trimm, Customs Cabinets, Mouldings & Crafts		
Tools Specification	F-1850	F-1832	
Length :	255 mm	230 mm	
Width :	55 mm	55 mm	
Height :	240 mm	197 mm	
Weight :	1.40 Kg	1.20 Kg	
Load Capacity :	100 Nails	100 Nails	
Nail Lenght	15-50	10-32	



AP - 0621
Headless Pinner 23 G




MODEL NO.

AP-0 621	Application : Moulding, Glazings / Strips, Furnitured Cabinets		
Tools Specification	Nails (mm)		
Length : 255 mm	L : 12-20		
Width : 45 mm	SWG : 23		
Height : 152 mm	ST : 0.64 MM		
Weight : 1 Kgs	Gauge : 23		
Load Capacity : 200 Nails			
<i>*L - Lenght, SW - Shank Width, ST - Shank Thickness</i>			



F - 1650
Heavy Duty Wire-Nailer




MODEL NO.

F-1650	Application : Cabinets / Furnitured		
Tools Specification	Nails (mm)		
Length : 310 mm	L : 20-50		
Width : 77 mm	Sw : 1.6 mm		
Height : 270 mm	ST : 1.4mm		
Weight : 2.18 Kgs			
Load Capacity : 100 Nails			
<i>*L - Lenght, SW - Shank Width, ST - Shank Thickness</i>			



AT-3060
Heavy Duty Stapler



MODEL NO.

AT-3060	Application : Roof Deck, Wall Sheathing, Wood shingles, Paneling, Carpet Installation, Cabinet Work		
Tool Specification	AT-3060		
Crown :	26.5 mm		
Shank Thickness	1.8 mm		
Shank Width	2.1 mm		
Length :	20-38 mm		
Gauge	14		
Pressure	65-110 psi		
Load Capacity	100 pcs		

3/8", 1/2" & 3/4" Impact Wrenches Kits - DIY



I-30
3/8" Sq. Impact Wrench (Butterfly)




RY - 211 / RY - 211 B
3/8" Single Hammer Impact Wrench Kit



I - 32 K
3/8" Impact Wrench Kit



RY 213 / RY- 213 B
1/2" Single Hammer Impact Wrench Kit

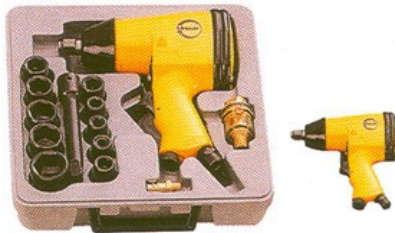


I - 40 / I - 04 K
1/2" Impact Wrench Kit



RY - 231
1/2" Twin Hammer Impact Wrench



RY - 214 B (Rocking Dog Hammer)
3/4" Impact Wrench



RY - 263 (Twin Hammer)
3/4" Impact Wrench



I - 60 (Rocking Dog Hammer)
3/4" Impact Wrench

Technical Specification

Model No.	SQ. Drive	Capacity (mm)	Free Speed (rpm)	Max Torque		Overall Length (mm)	Air Consumption (cfm)	Weight (kg)	Air Inlet (Inch)
	(Inch.)			(ft-lb)	(nm)				
I-30	3/8"	10	10,000	75	102	140	6	0.95	1/4"
RY-211	3/8"	13	7,000	120	163	152	6	1.35	1/4"
I-32	3/8"	13	9,000	120	163	149	6	1.44	1/4"
RY-213	1/2"	16	7,000	230	312	180	6	2.36	1/4"
I-40	1/2"	16	7,000	230	312	178	6	2.5	1/4"
RY-231	1/2"	16	7,000	400	542	190	6	2.56	1/4"
RY-214	3/4"	25.4	4,200	500	678	255	12	4.6	3/8"
RY-263	3/4"	32	6,000	900	1220	216	12	4.35	1/4"
I-60	3/4"	25.4	4,200	500	678	255	12	4.6	3/8"

Cargo Air Tools



AG-01A
Angle Die Grinder



AG-01B
Air Rotary Sander



DS-04
Air Diamond Sander



SM-825
7" Angle Polisher



CG-7107
Die Grinder



CG-7150-18/21
Extended Die Grinder



CG-3001/3002/3003
Heavy Duty Chipping Hammer



CG-3018
Air sand Rammer



CG-3016
Air Bench Rammer

Technical Specification

Model No.	Free Speed rpm/bpm	Collet/Pad Size(mm)	Overall Length (mm)	Weight (kgs)	Avg. Air Consumption (cfm)	Air Inlet (Inch)
AG-01A	15,000	6	160	0.81	4	1/4"
AG-01B	15,000	50/75	160	0.68	4	1/4"
DS-04	15,000	50/75	160	0.7	4	1/4"
SM-825	2,500	175	305	2.0	8	1/4"
CG-7107	35,000	6	124	0.5	-	1/4"
CG-7150-18/21	18,000/21,000	6	317	2.5	-	3/8"
CG-3001/02/03	2820/2400/1900	-	308/327/378	5.5/5.9/6.5	-	3/8"
CG-3018	800	-	1156	10.9	-	3/8"
CG-3016	850	-	460	4.2	-	3/8"

H.V.L.P. Spray Gun, Paint Brush, Engine Cleaning/ Under Coating Gun & Mini Air Compressors



SG - 40 (Cup Capacity : 1000cc)
High Pressure Siphon
Feed Spray Gun
Air Pressure : 18 - 70 PSI
Weight : 0.47 kg



AR - 11
Mini Air Regular
With Gauge

SG - 04 A (Cup Capacity : 600cc)
High Volume Low Pressure Gravity
Feed Spray Gun (H.V.L.P)
Air Pressure : 51 -70 PSI
Weight : 1.1 kg



SG - 92 (Cup Capacity : 600cc)
High Volume Low Pressure Siphon
Feed Spray Gun (H.V.L.P)
Air Pressure : 51 -70 PSI
Weight : 1.1 kg



AB - 1001
Professional Painter Air Brush Kit



AB - 1006
Professional Painter Air Brush Kit



SG - 08 (Cup Capacity : 0.125ltr)
High Volume Low Pressure Gravity
Feed Spray Gun
Air Pressure : 40-45 psi, Weight : 0.5 kg
Optional Nozzle : 0.5,0.8,1.1,2.0 mm



AG - 00
Air Engine Cleaning Gun



AG - 01
Air Under Coating Gun



RY - 720 K
2 in 1 Air Wonder Gun Kit



SG - 80 (Cup Capacity : 10 ltr)
Heavy Duty Industrial Paint Spray Gun (Pressure type)
Air Pressure : 30-80 psi, Weight : 11 kg
Standard Nozzle : 1 mm



AT - 20T
20L Paint Tank



MA - 20 (With 3.5 Lt. Tank)
(Max. Pressure - 100PSI)
Oil Less Mini Air Compressor

Other Pneumatic Tools & Accessories

DIY



RY - 500D
Impact Screw Driver 4mm Cap. 8,000rpm
Torque - 23-69 kgf/cm. Weight - 0.66kg

DIY



SD - 60A
Impact Screw Driver 5mm Cap. 8,000rpm
Torque - 23-69 kgf/cm. Weight - 0.66kg




B-281R, Composite Air Scissors
Cutting Cap.: Aluminium 1.6mm/
Steel 1.2mm 2,600 RPM



H - 17, 150 mm Air Hammer
(Comosite Housing)



B36 - 6
Grease Gun Kit (400 cc)
B 36
Grease Gun (400 cc)



SB-74k
Spark plug cleaner kit



B - 40
Air Caulking Gun
Tube Size - $\varnothing 2 \times 8 \frac{1}{2}$



S - 001
Suction Cupset
Capacity - 160 kg.



S - 002
Suction Cup
Capacity - 40 kg.



**CHIPPING
CHISELS**



Velcro & Stick Pad



Impact Socket (All Sizes)
3/8", 1/2", 3/4", 1" sq. drive

Spring Balancers & Hose Reels



SB - 03
Spring Balancer (0.6-1.5 kg)



SB - 04 A
Spring Balancer (1-2 kg)



SB - 04
Spring Balancer (1.5-3 kg)



SB - 07
Spring Balancer (3-5 kg)



SB - 9 Cargo
Spring Balancer (4.5 to 9 kg)



SB - 30 Cargo
Spring Balancer (22-30 kg)

Technical Specification

Model No.	Balancing Cap. (kg)	Travell (mm)	DIA of Cable	Weight (kg)
SB - 5	2.5-5	1.3	3 mm	1.5
SB - 9	4.5-9	1.3	4 mm	3.4
SB - 15	9-15	1.3	4 mm	3.8
SB - 22	15-22	1.5	5 mm	8.0
SB - 30	22-30	1.5	5 mm	8.0

* Other sizes are available on request



Metal Housing Hose Reel
Size : 8 × 12 mm × 15 Feet
8 × 12 mm × 25 Feet
8 × 12 mm × 45 Feet
Housing Colour : Grey / Yellow
Tube Colour : Yellow Colour



Air Hose Reel - HR-0325V
Steel Case
Size : 5" /16" ×15 Mts.



Air Hose Balancer
Tube Size : 5 × 8 mm × 4 Feet
Max Cap. 1.5 kg