

DYNAVAC[®]

Industrial Vacuum Cleaners & Dust Collection Equipment



Industrial Vacuum Cleaners

Industrial vacuum cleaner Wet & Dry dust collection

Hydra Standard (Hydra STD)

High vacuum & Maintenance free blower

Vacuum gauge for identifying suction power

Fleeted dust for higher filtration area and

High capacity collection drum

PU Wheels for long lasting performance and easy movement

Secondary filter for 100% air filtration

Manual shaker arrangement for easy cleaning

Optional

HEPA filter (H14)

Liquid sensor

Drain valve

Stainless/Flame proof models

Technical Specification of Hydra STD, Hydra ML & Hydra PJ

Hydra Series	Power (kW)	Maximum Vacuum (mm H ₂ O)	Airflow (m ³ /Hr)	Collection Capacity (liters)	Filter Efficiency	Dimension LxBxH (m)	Weight (kg)
Hydra 1.0	0.75	1950	100	80	M	0.8 x 0.65 x 145	85
Hydra 3.0	3.00	3000	318	80	M	0.8 x 0.65 x 1.70	117
Hydra 5.0	4.00	3000	420	80	M	0.8 x 0.65 x 1.70	119
Hydra 5	4.00	2050	490	80	M	1.2 x 0.65 x 140	195
Hydra 7.0	5.50	3750	510	80	M	1.2 x 0.65 x 140	220
Hydra 7	5.50	2300	700	80	M	1.2 x 0.65 x 140	225


hydra

Industrial vacuum cleaner Wet & Dry dust collection

Hydra Metal & Liquid (Hydra ML)



Optional



HEPA filter (H14)



Automatic cleaning system



Built in compressor for automatic cleaning



Stainless/Flame proof models

Industrial vacuum cleaner Wet & Dry dust collection

Hydra Pulse jet (Hydra PJ)

High vacuum &
Maintenance free blower



Polyester cartridge filters
for effective filtration



Automatic cleaning
system to avoid filter
choking



Latch locks to ensure
perfect locking




Accessories tray for
placing all accessories
safely and to
take along with machine



PU Wheels for long lasting performance
and easy movement

Optional



HEPA filter (H14)



Liquid sensor



Drain valve



Built in compressor for
automatic cleaning



Stainless/Flame
proof models

Industrial Vacuum Cleaner Dry Use



High filtration dust bags for proper filtration



Latch locks to ensure perfect locking

PU Wheels for long lasting performance and easy movement



Vacuum gauge for identifying suction power

Sleek drum with blowing option attachment



High vacuum & Maintenance free blower

Optional



Floor brush attachment model



Stainless steel model



Flame proof model



Nova cross section

Technical Specification

Nova Series	Power (kW)	Maximum Vacuum (mm H ₂ O)	Airflow (m ³ /Hr)	Collection Capacity (liters)	Filter Efficiency	Dimension LxBxH (m)	Weight (kg)
Nova 1.0	0.75	2100	144	40	M	045 x 0.5 x 0.8	44
Nova 3.0	3.00	3000	318	70	M	0.60 x 0.6 x 14	63
Nova 5.0	4.00	3000	420	70	M	0.60 x 0.6 x 14	90
Nova 5	4.00	2050	490	80	M	1.20 x 0.6 x 1.1	120
Nova 7.0	5.50	3750	510	95	M	0.70 x 0.8 x 14	175
Nova 7	5.50	2300	700	180	M	140 x 0.7 x 1.2	189

Accessories



Round Brush



Floor Brush



Small Crevice Nozzle



Imported Flat Nozzle



PVC Flat Nozzle



PVC Curved Nozzle



1-foot PVC Pipe



4-foot PVC Pipe

Single Phase Commercial Vacuum Cleaner – Wet & Dry Use



Prime - I



Prime - II



Prime - III

Accessories

Prime - I



Prime - II & III



Technical Specification

Prime Series	Power (kW)	Maximum Vacuum (mm H ₂ O)	Airflow (m ³ /Hr)	Collection Capacity (liters)	Filter Efficiency	Dimension LxBxH (m)	Weight (kg)
Prime I	1.2	2200	190	30	M	04 x 04 x 0.7	8
Prime II	2.0	2200	350	70	M	0.6 x 0.6 x 0.8	20
Prime III	3.0	2200	380	70	M	0.6 x 0.6 x 0.8	22

Optional: HEPA filter and floor brush attachment models available.

Features

- Powerful silenced single phase Ametek® motor with auto thermal cut off
- Wet & dry applications
- Stainless steel tank
- Professional closing hooks
- Shock proof trolley
- Cloth filter
- Traceless wheels
- 1 year warranty
- 1.5 m hose for flexible cleaning
- 4.5 m power cable


Reliability

*Dynavac offers a 2 year warranty.
We take pride in the quality of our
workmanship and product reliability.*



Quality

*Quality is everyone's responsibility and
we never stop getting better at it.
At Dynavac, Quality is our daily mantra.*

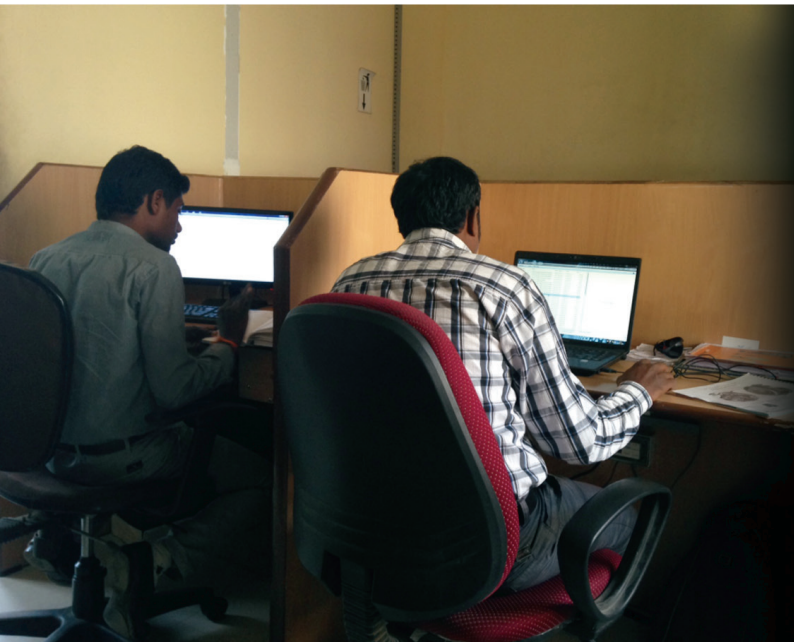

Infrastructure





302, ALG Farms,
Nambialaganpalayam,
Vedapatti (P.O),
Coimbatore - 641 007
India

Tel : +91 (422) 4525555 (20 lines)
Mob : +91 9677600302, 9443721682
Fax : +91 (422) 4525597
email : sales@dynavac.org

www.dynavac.in

