



Figure – 1



Figure – 2



Figure – 3

**Applications**

- Industrial Lighting
- Factory Lights
- Shop Floor Lights
- Shopping Malls


**Features**

- Eco Friendly
- Low Power Consumption
- No UV & IR Radiation
- Long Life
- Less Heat
- No Bugs
- Instant On & Off

**Specifications**

LED Type	Multiple / COB
Beam Angle of Reflector	45° / 90° / 120°
Input Voltage	85 to 250 V AC
Power Factor	≥ 0.98
Power Supply	Mean well
Power Efficiency	≥ 0.92
Material	Extruded Aluminium + MPCB + LENS + Stainless
Wattage	100 W / 120 W / 150 W
Colour	Warm White / Natural White / Cool White

**01 Multiple choice of reflector with different beam angle**

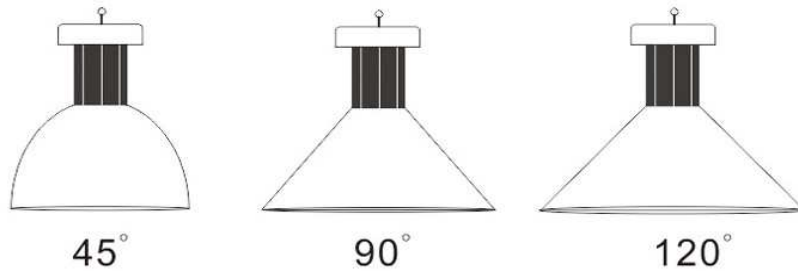

**02 Installation Height suggested**

