

Electric Wire Rope Hoist

FEATURES SALIENT


Manufactured as per IS : 3938 & 807
100% Steel Fabricated
Electro-Magnetic Brake
Precious Machine Cut
Alloy Steel Gears
Helical Gears
Rope Drum-Out of Seamless Pipe
Best Electrical Components
Swivelling Snatch Block
S4 Crane Duty Motors
Adjustable Mounting
Long Lasting Life

OPTIONAL

Unconditional Warranty
Variable Speed Variant
Special Applications
Soft Start & Stop
Gravity type Emergency Limit Switch
Intelligent Panel
Flame Proof
Rope Guide
Latch Hook
Rust Proof
Disc Brake

SAFETY

Emergency stop
Overload Tripping
Limit Switch

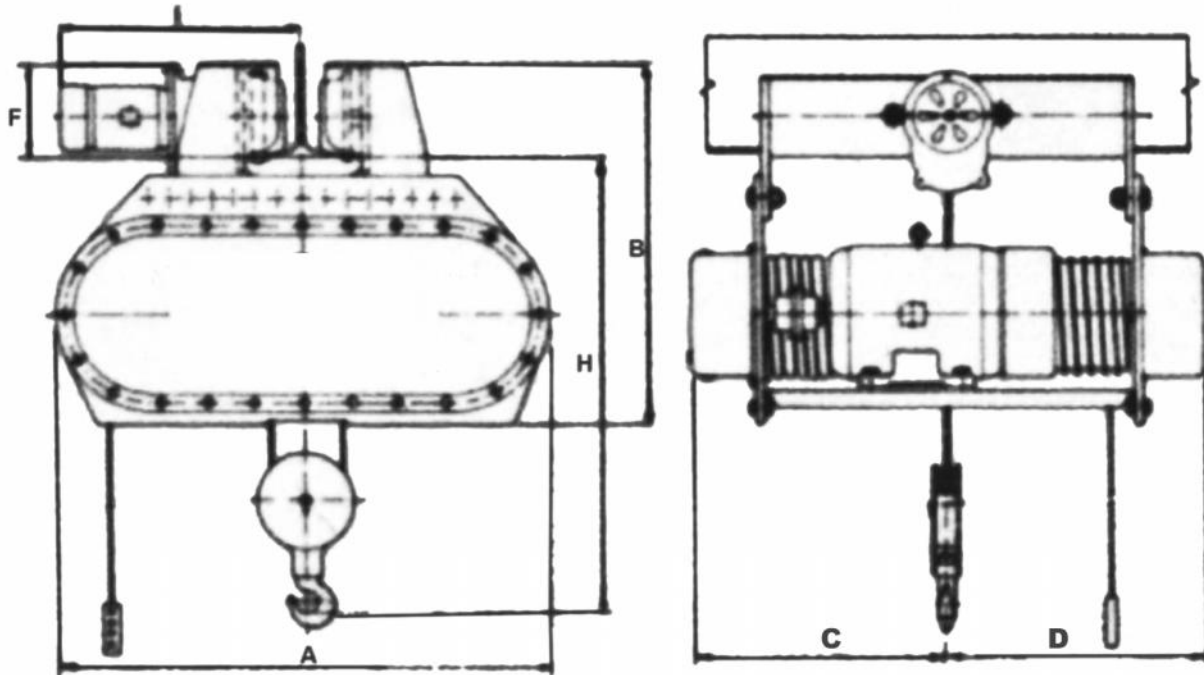

HOIST PARAMETERS

Model No.	Capacity in Kgs.	Hight of Light (Mts.)	Lifting Speed (M.P.M.)	Travel Speed (M.P.M.)	Hoist Motor (HP)	C.T. Motor (HP)	Falls of rope/ Driven
GH-0	500	6	4.0	18	1.00	0.25	2
GH-1	1000	6	4.0	18	1.50	0.25	2
GH-2	2000	6	4.0	16	3.00	0.50	2
GH-3	3000	6	5.0	16	5.00	0.50	4
GH-5	5000	6	3.0	16	5.00	0.1	4
GH-4	7500	6	3.0	12	7.50	1.5	4
GH-4	10000	6	1.5	12	10.00	1.5	4

Falls width of "I" Beam	Dimensions (mm)						Wt. Kg.
	A	B	C	D	H	I	
90-140	540	460	410	410	675	440	150
90-140	540	460	410	410	675	440	170
100-140	750	600	510	510	750	530	375
125-140	750	600	510	510	750	530	475
140-210	890	680	585	585	950	570	650
150-210	890	680	585	585	950	570	775
150-210	1000	900	830	710	1250	600	1250

Data tolerance 10%

All dimensions in mm

Above mentioned specifications are subjected to change without any prior intimation for betterment of the product