


SATURN

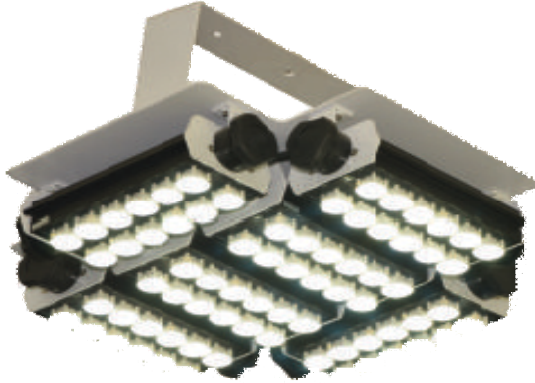

Specifications

Input Voltage	230V AC 50 Hz
Operating Temperature	-20 °C to 50 °C
Protection	IP 65
Colour Temperature	3000 K/4000K/6000K
Colour Rendering Index	> 70
Lifespan	Typically 50, 000 Hours
Power Factor	> 0.9
Safety Standard	EN 60598
EMC / EMI Standard	EN 61547/EN 55015
Harmonics	EN 61000-3-2 and 61000 - 3- 3

Product Description

Adjustable outer wings make Saturn an ideal light for industrial lighting applications. Suitable for Warehouses, Manufacturing Units, and Cold Stores.

Other Features


Dimmable (Optional)

Product Code	Input Power	Lumen Output	Replacement of	Size (L x B x H)
IM 04 61	150 W	13050	400 W HPSV	460 x 460 x 259
IM 04 62	100 W	8700	250 W HPSV	440 x 440 x 259
IM 04 68	300 W	26100	2 X 400 W HPSV	682 x 508 x 252
IM 04 69	350 W	30450	1000 W HPSV	682 x 605 x 235

Mechanical


Housing	Powder Coated Mild Steel
Optics	PMMA Lens
Installation	Surface / Suspended

Dimension Drawing

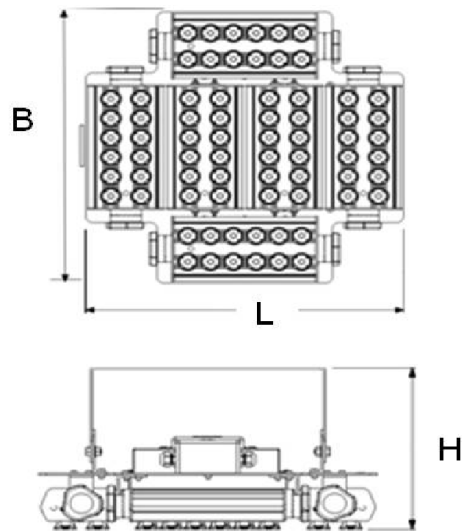

All dimensions in mm

Polar Candela Distribution

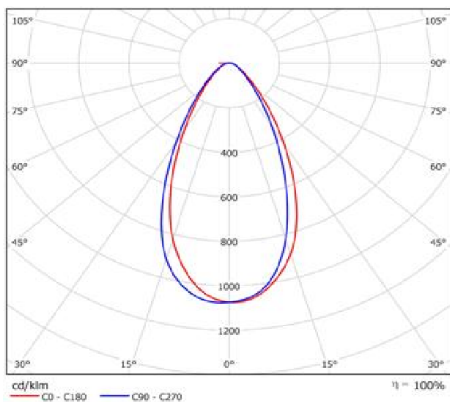

Application Area

Industrials Sheds, Warehouse, Railways Stations, Airport Hangars

