



★
Twinkle
INDUSTRIES

Product Catalogue 2K20

HIGH BRIGHTNESS

HIGHER EFFICIENCY

HIGHEST SAVINGS



HIGHBAY/UFO LIGHTS

➤ UFO LENS SERIES

Heavy Duty IP65 Isolated Easy Smooth
Aluminium Housing Driver Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	Hanging
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°



MODEL	WATTAGE	LUMEN
TI-UFLNS50W	50W	6500
TI-UFLNS100W	100W	13000
TI-UFLNS150W	150W	21000

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



FLOOD LIGHTS

➤ Jupiter SERIES

Heavy Duty IP65 Isolated Easy Smooth
Aluminium Housing Driver Installation



TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°

MODEL	WATTAGE	LUMEN
TI-FLJT50W	50W	7000
TI-FLJT100W	100W	14000
TI-FLJT150W	150W	21000
TI-FLJT200W	200W	28000



Latest Design | Energy Saving | High Brightness | Life more than 50000 Hrs | 90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



FLOOD LIGHTS

➤ alpha SERIES

Heavy Duty
Aluminium Housing

IP65 Isolated
Driver

Easy Smooth
Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°

MODEL	WATTAGE	LUMEN
TI-FLAP30W	30W	4200
TI-FLAP50W	50W	7000
TI-FLAP100W	100W	14000
TI-FLAP150W	150W	21000
TI-FLAP200W	200W	28000



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



FLOOD LIGHTS

➤ beta SERIES

Heavy Duty IP65 Isolated Easy Smooth
Aluminium Housing Driver Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°

MODEL	WATTAGE	LUMEN
TI-FLBT50W	50W	7000
TI-FLBT100W	100W	14000
TI-FLBT150W	150W	21000
TI-FLBT200W	200W	28000



Latest Design | Energy Saving | High Brightness | Life more than 50000 Hrs | 90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



FLOOD LIGHTS

➤ Omega LENS SERIES

Heavy Duty Aluminium Housing IP65 Isolated Driver Easy Smooth Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°

MODEL	WATTAGE	LUMEN
TI-FLOM30W	30W	4200
TI-FLOM36W	36W	5040
TI-FLOM50W	50W	7000
TI-FLOM60W	60W	8400
TI-FLOM100W	100W	14000
TI-FLOM120W	120W	16800
TI-FLOM150W	150W	21000
TI-FLOM180W	180W	25200
TI-FLOM240W	240W	33600



Latest Design | Energy Saving | High Brightness | Life more than 50000 Hrs | 90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



FLOOD LIGHTS

> Sigma SERIES

Heavy Duty IP65 Isolated Easy Smooth
Aluminium Housing Driver Installation

TECHNICAL SPECIFICATIONS


Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°

MODEL	WATTAGE	LUMEN
TI-FLSG20W	20W	2800
TI-FLSG36W	36W	5040
TI-FLSG50W	50W	7000
TI-FLSG100W	100W	14000
TI-FLSG150W	150W	21000
TI-FLSG2000W	200W	28000
TI-FLSG360W	360W	50400
TI-FLSG420W	420W	58800



Latest Design | Energy Saving | High Brightness | Life more than 50000 Hrs | 90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com

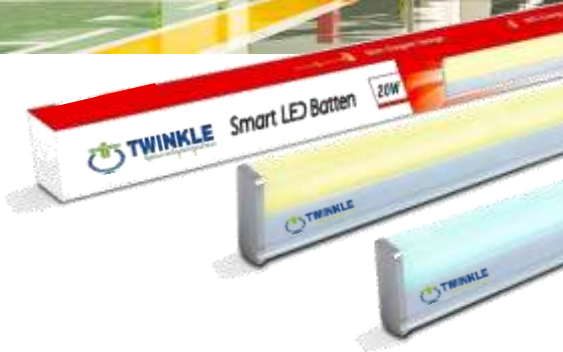

➤ LED TUBELIGHTS T5/T8

Heavy Duty
PC Housing

Heavy Duty
Driver

Easy Smooth
Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	3000/4000/6500K
Power Factor	> 0.95
Surge Protection	4 KV Surge
Input Voltage	AC 90-400 V
Base Type	Wall/Ceiling Mount
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Ingress Protection	IP40
Dispersion Angle	

MODEL	WATTAGE	LUMEN	LENGTH
TI-TL10W	10W	1200	2 FT
TI-TL20W	20W	2400	4 FT
TI-TL24W	24W	2880	4 FT
TI-TL36W	36W	4320	4 FT



IT/ITES



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



STREET LIGHTS

➤ GLASS SERIES

Heavy Duty
Aluminium Housing

IP65 Isolated
Driver

Easy Smooth
Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°

MODEL	WATTAGE	LUMEN
TI-SLGS20W	20W	2800
TI-SLGS36W	36W	5040
TI-SLGS50W	50W	7000
TI-SLGS100W	100W	14000
TI-SLGS150W	150W	21000
TI-SLGS2000W	200W	28000
TI-SLGS360W	360W	50400
TI-SLGS420W	420W	58800



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



STREET LIGHTS

➤ LENS SLEEK SERIES

Heavy Duty IP65 Isolated Easy Smooth
Aluminium Housing Driver Installation

TECHNICAL SPECIFICATIONS

Color Temperature	6500K
Power Factor	> 0.95
Surge Protection	6 KV Surge
Input Voltage	AC 90-400 V
Base Type	AL. Dye Cast
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 10%
Ingress Protection	IP65/67
Dispersion Angle	> 120°



MODEL	WATTAGE	LUMEN
TI-SLSL20W	20W	2800
TI-SLSL24W	24W	3360
TI-SLSL30W	30W	4200
TI-SLSL36W	36W	5040
TI-SLSL50W	50W	7000
TI-SLSL70W	70W	9800
TI-SLSL100W	100W	14000



Latest Design | Energy Saving | High Brightness | Life more than 50000 Hrs | 90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED BULB SERIES

➤ INVERTER BULB

High Power Backup up to 4 Hrs. Powerful Lithium Battery Generator & Inverter Compatible

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	4 KV Surge
Input Voltage	AC 90-400 V
Base Type	B22/E27
Color Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Ingress Protection	IP20

MODEL	WATTAGE	LUMEN
TI-INV07W	7W	700
TI-INV09W	9W	900
TI-INV12W	12W	1200



STATES



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED BULB

➤ PREMIUM SERIES

Aluminium Housing IC Driver Long Life Up to 5 Years* Energy Saving up to 80%

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	4 KV Surge
Input Voltage	AC 90-400 V
Base Type	B22/E27
Color Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Light Angle	180°

MODEL WATTAGE LUMEN

TI-BLPR05W	5W	600
TI-BLPR07W	7W	840
TI-BLPR09W	9W	1080
TI-BLPR12W	12W	1440
TI-BLPR15W	15W	1800
TI-BLPR20W	20W	2400



STATES



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED BULB

➤ DELUXE SERIES

Aluminium Housing DOB MCPCB Long Life Up to 3 Years* Energy Saving up to 80%

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	1.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	B22/E27
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Light Angle	180°

MODEL	WATTAGE	LUMEN
TI-BLDL03W	3W	300
TI-BLDL05W	5W	500
TI-BLDL07W	7W	700
TI-BLDL09W	9W	900
TI-BLDL12W	12W	1200
TI-BLDL15W	15W	1500



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED BULB

➤ DELUXE_PRIME SERIES

PP Housing DOB MCPCB Long Life Up to 2 Years* Energy Saving up to 80%

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	1.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	B22/E27
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Light Angle	180°

MODEL WATTAGE LUMEN

TI-BLDP7W 7W 630

TI-BLDP9W 9W 810



STATES



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED BULB

➤ COLOR LED BULB



TECHNICAL SPECIFICATIONS

Available Colours	RD/GR/BL/YL/WH/OR
Power Factor	> 0.50
Input Voltage	AC 90-400 V
Base Type	B22/E27
Ingress Protection (IP)	IP20



RESIDENTIAL



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



DEEP/CONCEAL LIGHTS



HEXA/AURA SERIES

Polycarbonate Housing DOB MCPCB Long Life Up to 2 Years* Energy Saving up to 80%

MODEL WATT COLOR

TI-DP03W	3W	CW WW RD GR BL PK
TI-DP03W	3W	3 IN 1 (CW-NW-WW)
TI-DP05W	5W	CW WW RD GR BL PK
TI-DP06W	6W	3 IN 1 (CW-NW-WW)
TI-DP07W	7W	CW WW RD GR BL PK
TI-DP09W	9W	CW WW RD GR BL PK

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	1.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 15%
Ingress Protection (IP)	IP20



ITES

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



COB LIGHTS



PREMIUM SERIES

Polycarbonate Housing DOB MCPCB Long Life Up to 2 Years* Energy Saving up to 80%

MODEL	WATT	COLOR
TI-COB03W	3W	CW WW RD GR BL PK
TI-COB06W	6W	CW WW RD GR BL PK
TI-COB09W	9W	CW NW WW
TI-COB11W	11W	CW NW WW
TI-COB16W	16W	CW NW WW
TI-COB30W	30W	CW NW WW
TI-COB50W	50W	CW NW WW

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	4 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 15%
Ingress Protection (IP)	IP20



ITES



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED WALL LIGHTS

➤ TRACK/WALL SPOT

Aluminium Housing IC Driver Long Life Up to 2 Years* Energy Saving up to 80%

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	4 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 15%
Ingress Protection (IP)	IP20



HOMES

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED PANEL LIGHTS

➤ SLIM EVER SERIES

Aluminium Housing Heavy Duty LED Driver Energy Saver Easy Smooth Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square

MODEL	WATT	LM	COLOR
TI-EVR08W	8W	1040	CW/NW/WW
TI-EVRT08W	8W	1040	3 in 1 (CW-NW-WW)
TI-EVR15W	15W	1950	CW/NW/WW
TI-EVRT15W	15W	1950	3 in 1 (CW-NW-WW)
TI-EVR22W	22W	2860	CW/NW/WW



ITES

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE



Latest Design


Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com

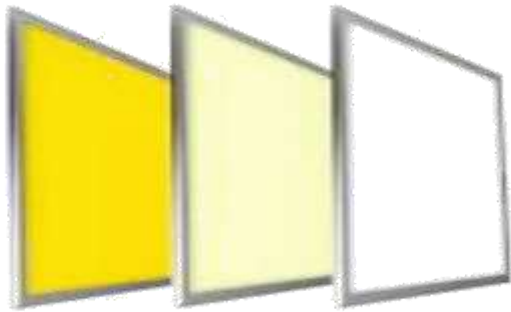

LED PANEL LIGHTS

➤ COMERICAL PANEL LIGHTS

Aluminium Housing Heavy Duty LED Driver Energy Saver Easy Smooth Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Ingress Protection (IP)	IP40



ITES

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE

Latest Design


Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com

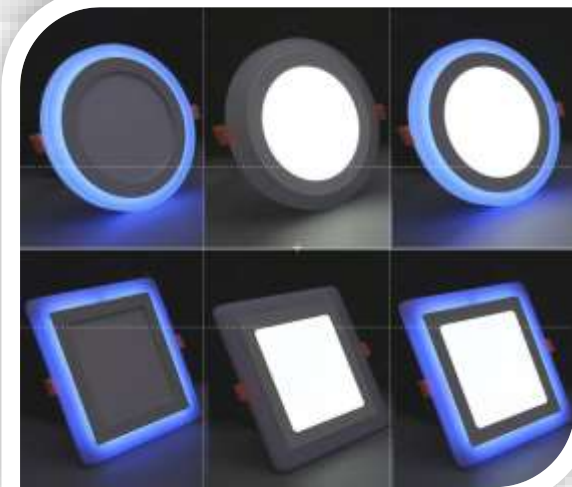

LED PANEL LIGHTS

➤ SIDE COLOR PANEL

Aluminium Housing Heavy Duty LED Driver Energy Saver Easy Smooth Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square



RESIDENTIAL

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE

Latest Design


Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com

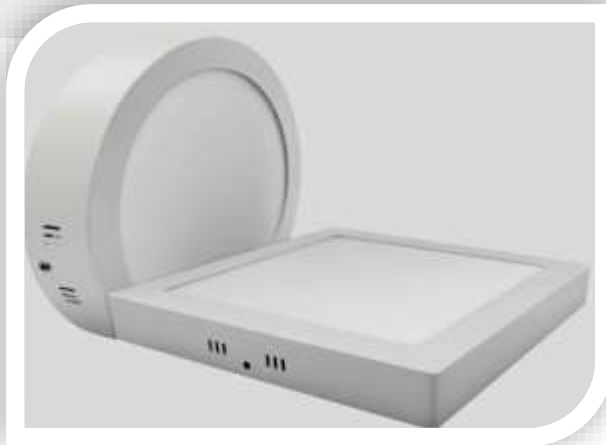

LED SURFACE LIGHTS

➤ SURFACE EVER SERIES

Aluminium Heavy Duty Energy Easy Smooth
Housing LED Driver Saver Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Surface
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square



MODEL	WATT	LM	COLOR
TI-SFEV08W	8W	1040	CW/NW/WW
TI-SFEV08W	8W	1040	3 in 1 (CW-NW-WW)
TI-SFEV15W	15W	1950	CW/NW/WW
TI-SFEV15W	15W	1950	3 in 1 (CW-NW-WW)
TI-SFEV22W	22W	2860	CW/NW/WW



IT/ITES

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED SURFACE LIGHTS

➤ SIDE COLOR SURFACE

Aluminium Heavy Duty Energy Easy Smooth
Housing LED Driver Saver Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Surface
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square



ITES

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE

MODEL

WATT

COLOR

TI-CSF03+3W	3+3W	WHITE + BL/PK/PGB
TI-CSF06+3W	6+3W	WHITE + BL/PK/PGB
TI-CSF12+4W	12+4W	WHITE + BL/PK/PGB

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



FREE CUTTING SIZE NARROW
EDGE PANEL ISOLATED DRIVER

LED PANEL LIGHTS

➤ ADJUSTABLE PANEL

Aluminium Heavy Duty Energy Easy Smooth
Housing LED Driver Saver Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square

MODEL

WATT

COLOR

TI-ADPL08W	8W	CW/NW/WW
TI-ADPL15W	15W	CW/NW/WW
TI-ADPL22W	22W	CW/NW/WW



IT/ITES



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED PANEL/SURFACE LIGHTS

➤ FRAMELESS PANEL/SURFACE

Aluminium Housing Heavy Duty LED Driver Energy Saver Easy Smooth Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	3000K/4000K/6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed/Surface
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square



RESIDENTIAL

COMMERCIAL

INDUSTRIAL

HOSPITALITY

HEALTHCARE

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED WALL LIGHTS

➤ COB CYLINDER

Aluminium Housing Heavy Duty LED Driver Energy Saver Easy Smooth Installation

TECHNICAL SPECIFICATIONS

Colour Temperature	6500K
Power Factor	> 0.95
Surge Protection	2.5 KV Surge
Input Voltage	AC 90-400 V
Base Type	Recessed
Colour Rendering Index (CRI)	> 80
Total Harmonic Distortion (THD)	< 20%
Design	Round/Square

MODEL	WATT	COLOR
TI-CYL08W	8W	CW/NW/WW
TI-CYL15W	15W	CW/NW/WW
TI-CYL22W	22W	CW/NW/WW



RESIDENTIAL



COMMERCIAL



INDUSTRIAL



HOSPITALITY



HEALTHCARE



Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com



LED STRIP LIGHTS

➤ STRIP/ROPE /NEON LIGHTS



Length : Starts from 5 MTRS.

Colour : White, WW, RD, GR, BL, PK, Amber

Latest Design

Energy Saving

High Brightness

Life more than 50000 Hrs

90% Driver Efficiency

Corp. Office: M22 Silicon City, Nr. Rose Garden, INDORE-453331 (Madhya Pradesh)
Phone: 0731-4991790, Mobile/WhatsApp: 9575435292, E-mail: sales2proton@gmail.com
Website: www.twinkleindustry.com

ON DEMAND PRODUCTS

UP-DOWN
DOWNLIGHTER



LIGHTS
PROFILE



3 4 6 WAY
DOWNLIGHTER



LED
LINEAR LIGHTS



LED
FAN LIGHTS

