


Ø 172 x 150 x 51 mm

- Motor Design : DC Brushless Motor
- Housing : Aluminium Die-cast
- Impellor : Nylon 66
- Bearing : Ball Bearing
- Operating Voltage : 24V (18 ~ 27 VDC)
48V (36 ~ 56 VDC)
- Dielectric Strength : AC 500V for 1 minute
- Insulation Resistance : Above 10M Ohms at 500 VDC
- Connection : W = Lead Wire
- Motor Protection : Reverse Polarity & Locked Rotor
- Operating Temperature : - 20 to +70°C
- Net Weight : 740 Grams



Specification

Model	Bearing	Voltage	Current	Input Power	Speed	Air Flow	Static Pressure	Noise
REC		V	A	W	RPM	CFM	mm H ₂ O	dB(A)
17251 B24 M W	Ball	24	0.70	16.8	3600	300	20	60
17251 B48 M W	Ball	48	0.40	19.2	3600	300	20	60

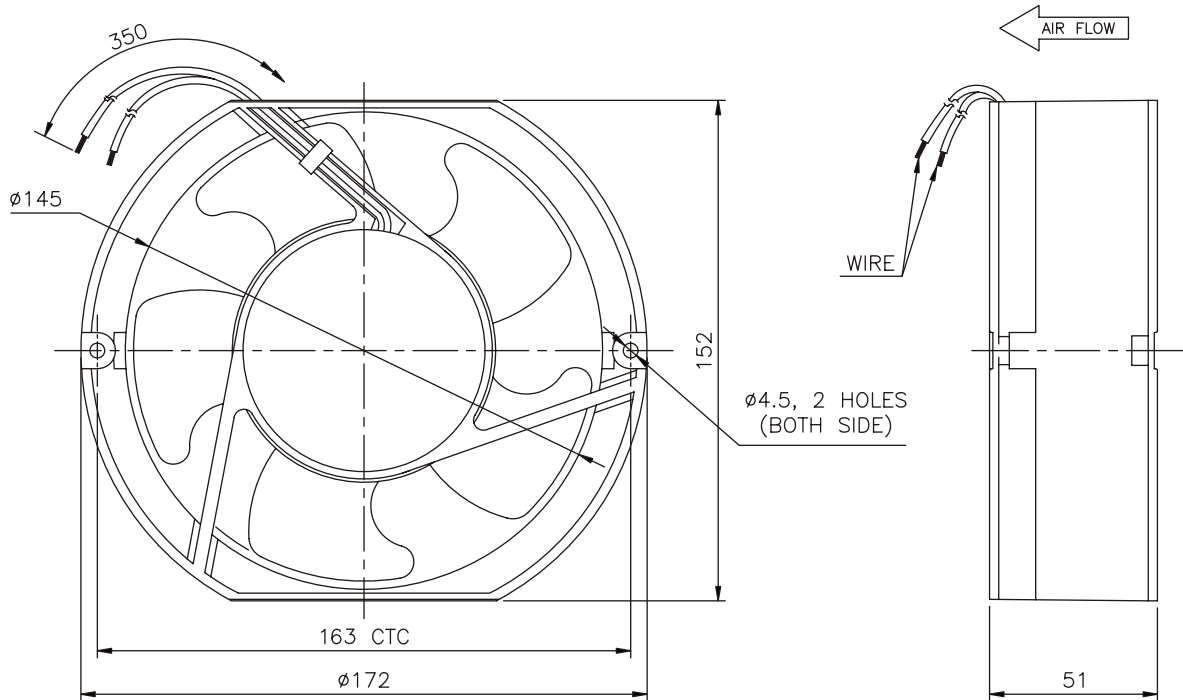

* Specifications Subject to Change Without Notice