


61 x 61 x 20 mm

Motor Design	: Shaded Pole Motor
Housing	: Aluminium Die-cast
Bearing	: Sleeve Bearing
Operating Voltage	: 230V (185 - 245 VAC)
Dielectric Strength	: AC 1500V for 1 minute
Insulation	: Class B
Insulation Resistance	: Above 100M Ohms at 500 VDC
Connection	: Lead Wire
Motor Protection	: Impedance Protected
Direction of Rotation	: CCW
Operating Temperature	: - 40 to + 40°C
Net Weight	: 590 Grams (680 Grams with Potting)


- Note:** Suitable Impellor
- 1) Aluminium Impellor Ø 150 mm (Air Flow Suction - V)
 - 2) Aluminium Impellor Ø 150 mm (Air Flow Throw - A)

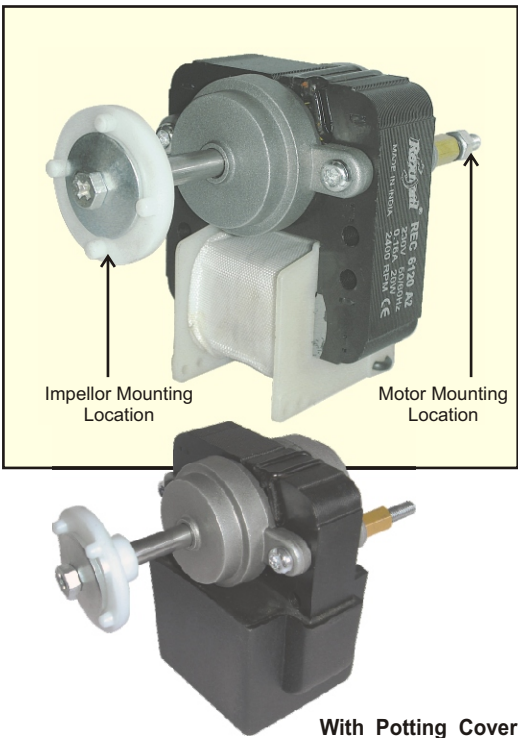

Specification

Model	Insulation	Bearing	Fan Blade	Voltage	Frequency	Current	Power Consumption	Speed	Air Flow
REC			Ø	V	Hz	A	W	RPM	CFM
6120 A2 - 01	With Potting	Sleeve	150	230	50	0.16	20	2400	137
6120 A2 - 02	Without Potting	Sleeve	150	230	50	0.16	20	2400	137

Note : Also Available in 115 VAC

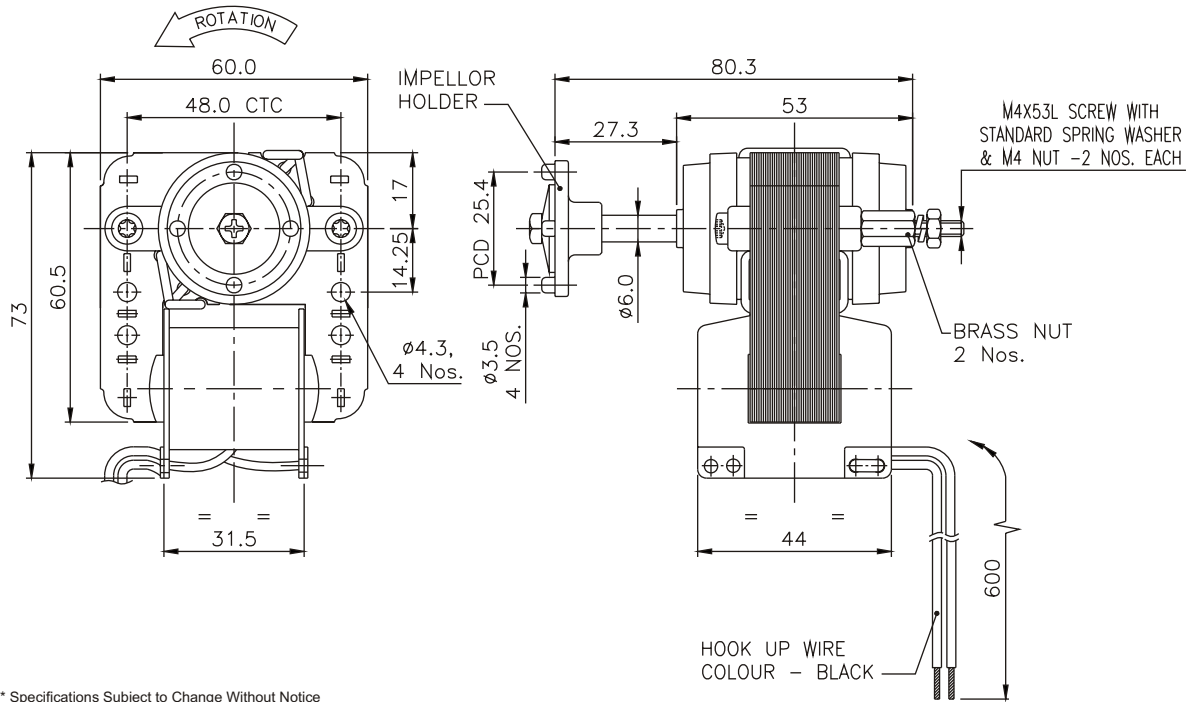

* Specifications Subject to Change Without Notice