

83 x 83 x 25 mm


- Motor Design : Shaded Pole Motor
- Housing : Aluminium Die - cast
- Bearing : Sleeve Bearing
- Operating Voltage : 230V (185 - 245 VAC)
- Dielectric Strength : AC 1500V for 1 minute
- Insulation : Class B
- Insulation Resistance : Above 100M Ohms at 500 VDC
- Connection : Lead Wire
- Motor Protection : Thermal Protected
- Direction of Rotation : CCW
- Operating Temperature : - 40 to + 40°C
- Net Weight : 1300 Grams



Specification

| Model        | Bearing | Fan Blade | Degree Angle | Voltage | Frequency | Current     | Input Power | Output Power | Speed       | Air Flow |
|--------------|---------|-----------|--------------|---------|-----------|-------------|-------------|--------------|-------------|----------|
| REC          |         | Ø         |              | V       | Hz        | A           | W           | W            | RPM         | CFM      |
| 8325 - 16 A2 | Sleeve  | 230       | 34°          | 230     | 50 / 60   | 0.36 / 0.33 | 52 / 50     | 16           | 1300 / 1500 | 510      |
|              | Sleeve  | 254       | 28°          | 230     | 50 / 60   | 0.36 / 0.35 | 54 / 55     | 16           | 1300 / 1500 | 580      |

Note : Also Available in 115 VAC

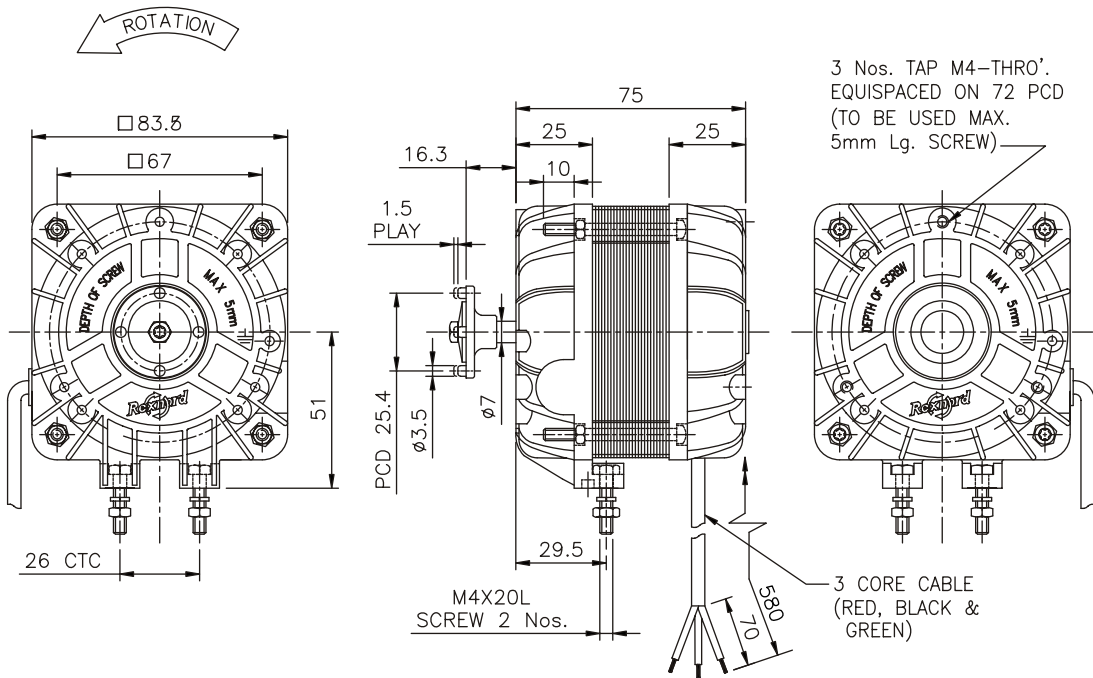

\* Specifications Subject to Change Without Notice