




## SF-16 Forming capacity



<b>Model number</b>	<b>SF-16</b>
<b>Wire Capacity</b>	<b>0.2-1.6 MM</b>
<b>Strip thickness</b>	<b>0.1-0.9 MM</b>
<b>Strip width</b>	<b>20 MM</b>
<b>Hardness</b>	<b>80C</b>
<b>Max. Feed length</b>	<b>150 MM</b>
<b>Max. Speed</b>	<b>200 PPM</b>
<b>Axes</b>	<b>1 or 2</b>
<b>Slides accessories (front)</b>	<b>6</b>
<b>Slides accessories (back)</b>	<b>1</b>
<b>Motor capacity for Press</b>	<b>05 ton</b>
<b>Motor capacity for Slides</b>	<b>0.8 Ton</b>
<b>Slide Cam System</b>	<b>Double cam system</b>
<b>Servo systems</b>	<b>Schneider</b>



## PART FUNCTIONS

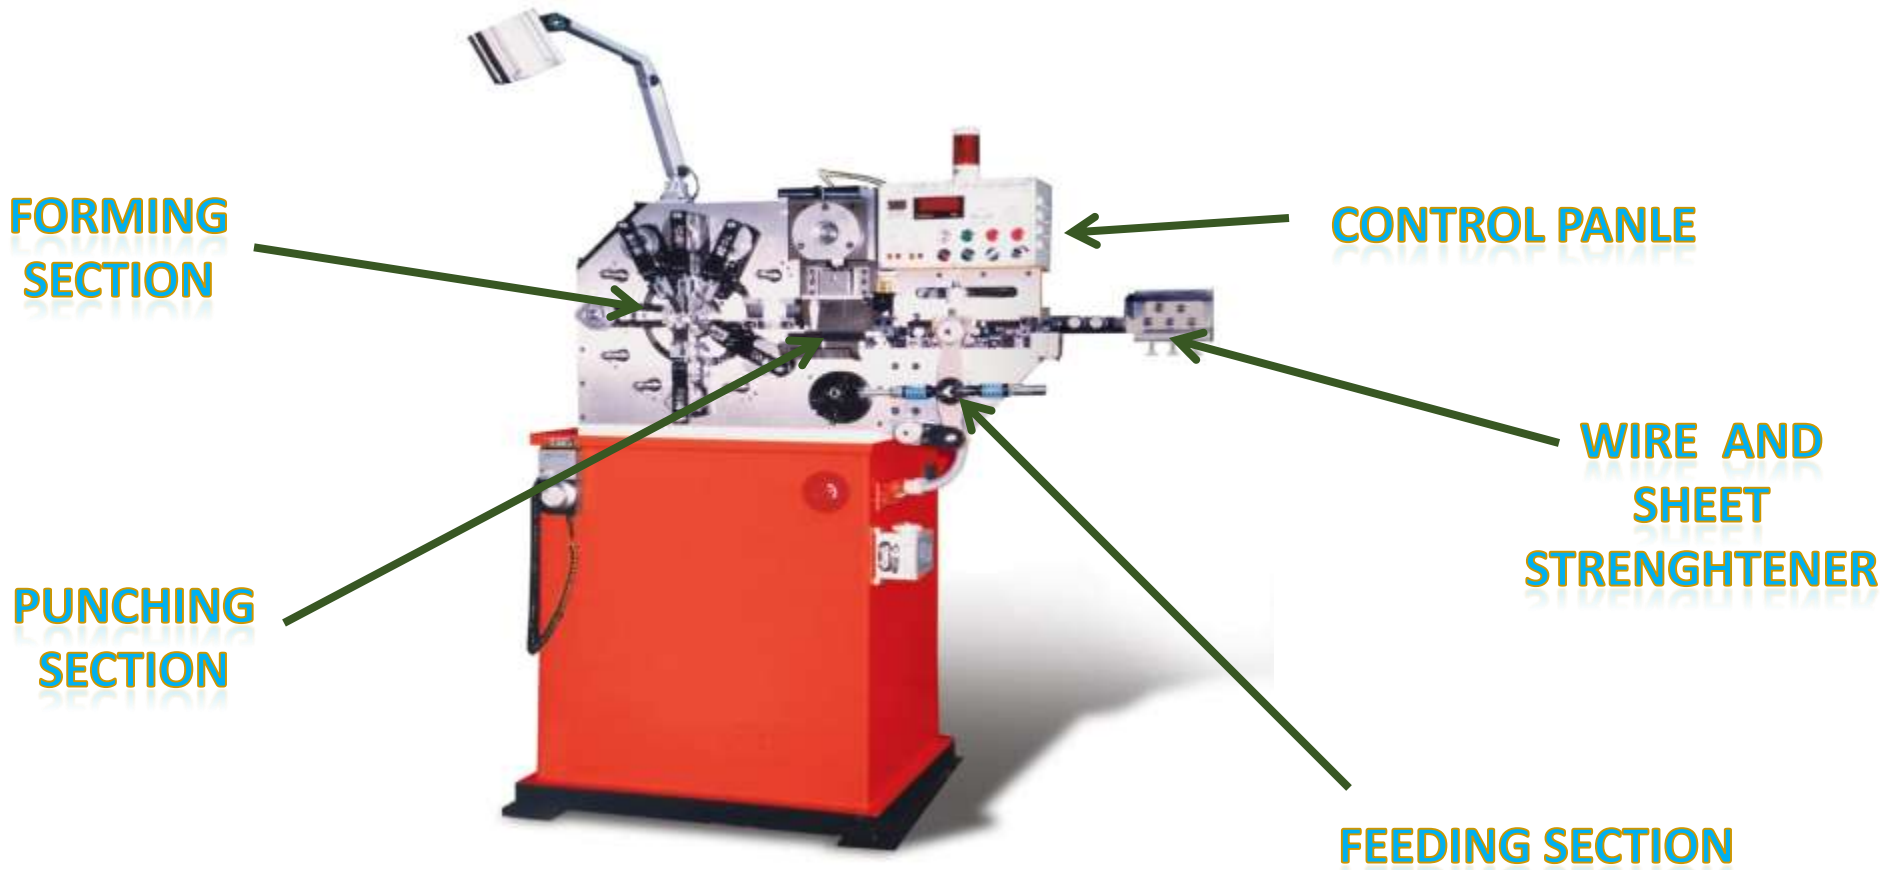



## MACHINE AND ACCESSORIES

