



An ISO 9001 : 2008 Certified Company

::: HYDRAULIC WASHING LIFT :::

:: Type :- Arms ::



:: TECHNICAL DETAILS ::

Lifting capacity	4.0Ton
Numbers of plungers	One
Lifting height	1500mm
Operating air pressure required	9-12kg/sq.cm
Oil receiver tank capacity	150-160 liters
Adjustable lifting arms	To lift all type passenger cars



An ISO 9001 : 2008 Certified Company

::: HYDRAULIC WASHING LIFT :::

:: Model :- PCP 40 ::



:: TECHNICAL DETAILS ::

Lifting capacity	4.0Ton
Numbers of plungers	One
Lifting height	1500mm
Pressure required	9-12kg/sq.cm
Platform length	4500mm
Platform width	700mm
Oil receiver tank capacity	150 liters



An ISO 9001 : 2008 Certified Company

::: HYDRAULIC WASHING LIFT :::

:: Model :- 2PCP 80 ::



:: TECHNICAL DETAILS ::

Lifting capacity	8.0Ton
Numbers of plungers	Two
Lifting height	1500mm
Pressure required	9-12kg/sq.cm
Platform length	7200mm
Platform width	820mm
Oil receiver tank capacity	150 Liters x 2



An ISO 9001 : 2008 Certified Company

::: HYDRAULIC WASHING LIFT :::

:: Model :- PCP 80 ::



:: TECHNICAL DETAILS ::

Lifting capacity	8.0Ton
Numbers of plungers	One
Lifting height	1500mm
Pressure required	9-12kg/sq.cm
Platform length	5800mm
Platform width	800mm
Oil receiver tank capacity	175 liters



An ISO 9001 : 2008 Certified Company

:: HYDRAULIC WASHING LIFT FOR HEAVY VEHICLES ::

:: Model :- PCP 160 ::



:: TECHNICAL DETAILS ::

Lifting capacity	16.0Ton
Numbers of plungers	Two
Lifting height	1500mm
Pressure required	9-12kg/sq.cm
Platform length	7600mm (Single platform)
Platform width	800mm
Oil receiver tank capacity	175 liters x 2 Nos.



An ISO 9001 : 2008 Certified Company

::: HIGH PRESSURE TRIPLEX PLUNGER PUMP ON FRAME :::

:: Model :- CW 850 ::



:: TECHNICAL DETAILS ::


Water output	11Lpm	12Lpm	14Lpm	14Lpm	15Lpm
Operating pressure	80bar	100bar	170bar	200bar	250bar
	1160psi	1450psi	2465psi	2900psi	3625psi
Motor power	2.0hp	3.0hp	5.0hp	7.5hp	10hp
Motor voltage	220v, 1ph	415v, 3ph	415v, 3ph	415v, 3ph	415v, 3ph



An ISO 9001 : 2008 Certified Company

::: CAR WASHER ON FRAME :::

:: Model :- CW 800 ::

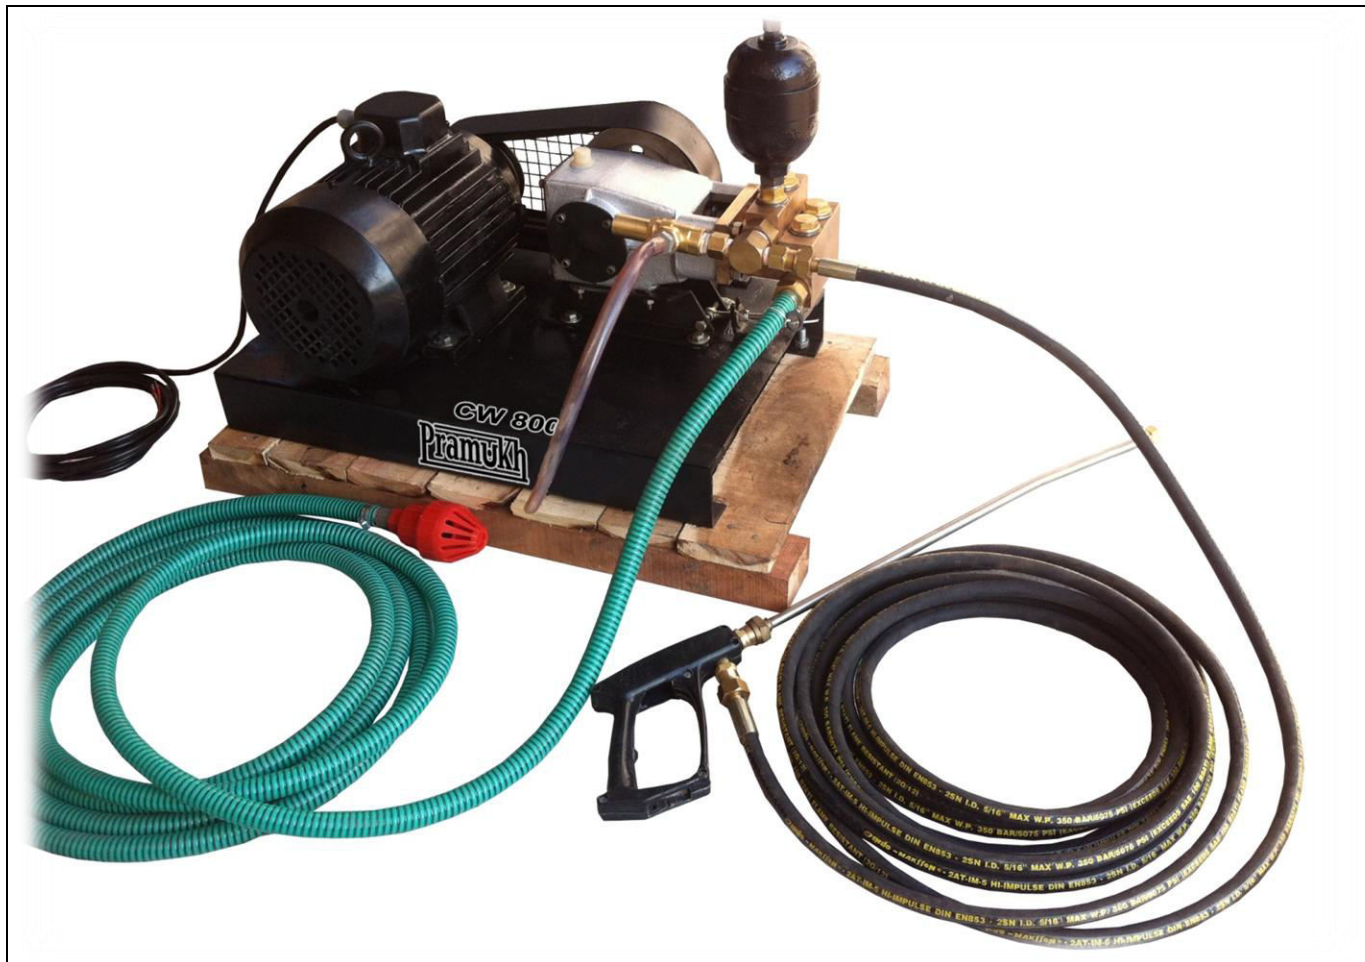

:: TECHNICAL DETAILS ::

Water output	650Ltr/hr
Operating pressure	110bar
	1600psi
Motor power	3.0hp
Motor voltage	415v, 3ph



An ISO 9001 : 2008 Certified Company

::: HIGH PRESSURE TRIPLEX PLUNGER PUMP ON TROLLEY :::

:: Model :- PCW 850 ::



:: TECHNICAL DETAILS ::

Water output	11Lpm	12Lpm	14Lpm	14Lpm	15Lpm
Operating pressure	80bar	100bar	170bar	200bar	250bar
	1160psi	1450psi	2465psi	2900psi	3625psi
Motor power	2.0hp	3.0hp	5.0hp	7.5hp	10hp
Motor voltage	220v, 1ph	415v, 3ph	415v, 3ph	415v, 3ph	415v, 3ph



An ISO 9001 : 2008 Certified Company

::: CAR WASHER ON TROLLEY :::

:: Model :- PCW 800 ::



:: TECHNICAL DETAILS ::

Water output	650Ltr/hr
Operating pressure	110bar
	1600psi
Motor power	3.0hp
Motor voltage	415v, 3ph



An ISO 9001 : 2008 Certified Company

::: CAR WASHER ON FRAME :::

:: Model :- CW 501 ::



:: TECHNICAL DETAILS ::

Water output	15Ltr/min
Operating pressure	60bar
	725psi
Motor power	2.0hp
Motor voltage	220v, 1ph



An ISO 9001 : 2008 Certified Company

::: PNEUMATIC GREASE PUMP :::



:: TECHNICAL DETAILS ::

Particular	PGP 150, PGP 250, PGP 500
Drum capacity	15, 25, 50kg
Operated by	Pneumatic
Output at 8.5kgf/cm ²	300-400grams per min.
Working pressure	4.5-10.5 kgf/cm ²
Air requirement	325lpm
I.D. of hose	6mm
Delivery hose length	2.2mtrs
Type of hose	High pressure wire braided oil resistant



An ISO 9001 : 2008 Certified Company

::: AIR COMPRESSOR :::

:: Model : SAI-10-SS2 ::



:: TECHNICAL DETAILS ::

Particular	SAI-10-SS2
CFM	6
RPM	728
Cylinder size	3" = 2-1/2
Max. working pressure	100psi
Vertical Air tank capacity	100liters
Electric motor	2hp
Motor power	220v, 1phase



An ISO 9001 : 2008 Certified Company

::: AIR COMPRESSOR :::



:: TECHNICAL DETAILS ::

Particular		PEC 3.0HP	PEC 5.0HP	PEC 7.5HP	PEC 10.0HP	PEC 15.0HP
Piston displacement	CFM	9.79	17.32	26.40	35.00	55
	M ³ /H	16.59	29.35	44.74	59.32	93.20
Max. pressure	KG/CM ² G	12.3	12.3	12.3	12.3	12.3
	PSIG	175	175	175	175	175
Air tank capacity	LITERS	150	200	225	300	300
Motor power	HP	3.0	5.0	7.5	10.0	15.0



An ISO 9001 : 2008 Certified Company

::: HIGH PRESSURE WASHING PUMP (DIESEL OPERATED):::



:: TECHNICAL DETAILS ::

Model	DHPW25	DHPW36A	DHPW36B
Pump Type	Radio-pump (Crankshaft)	Radio-pump (Crankshaft)	Radio-pump (Crankshaft)
Rated Pressure	170Bar (2500PSI)	250Bar (3600PSI)	250Bar (3600PSI)
Flow Rate	14L/min (3.7GPM)	15L/min (4GPM)	18L/min (4.7GPM)
Engine Type	D178F/E	D186F/E	D186FA/E
Engine Model	1-cylinder, vertical, 4-stroke, air-cooled	1-cylinder, vertical, 4-stroke, air-cooled	1-cylinder, vertical, 4-stroke, air-cooled
Displacement (cm ³)	296	406	418
Starting System	Recoil start; Electric start	Recoil start; Electric start	Recoil start; Electric start
Max. Output [KW(HP)/rpm]	4.0KW (5.5HP)/3600	6.3KW (8.6HP)/3600	6.3KW (8.6HP)/3600
Lube	SAE10W30 (above CC grade)	SAE10W30 (above CC grade)	SAE10W30 (above CC grade)
Fuel Type	0#(Summer), -10#(Winter) diesel oil	0#(Summer), -10#(Winter) diesel oil	0#(Summer), -10#(Winter) diesel oil