

HOLOGRAM TAPE TAMPER EVIDENT FOIL



Product Overview

General properties

- a) Embossing temperature 50 to 85 degree Celsius.
- b) Water based and PU adhesives are suitable
- c) Thickness 12 and 15 microns.

Main applications

Can be used as Hologram tapes

Key features

- a. Smooth releasing and film forming properties are excellent.
- b. Low temperature embossing property and high holographic effect

Shade availability


Hologram tape tamper evident foils are available only in limited range of shades like Silver, Gold, Green and other light shades.

www.rasikfoils.com

141Kms, Delhi-Agra bypass road, Near alwar railway bridge, Krishna nagar, Mathura (U.P), India 281004
Phone +91-565-2423365 Mobile +91-9927022764

STRUCTURE OF THE FOIL

HOLOGRAM TAPE TAMPER EVIDENT FILM

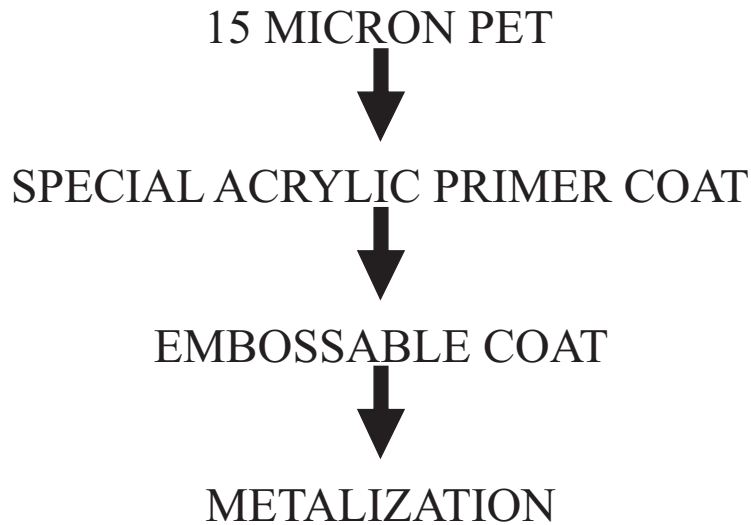

PROPERTIES

1. Tamper proof coat
2. Ultra clear PET film
3. Embossing temperature - 50 to 85 degree Celsius
4. Metal - Aluminum 99.6% pure
5. OD - 2.25

TEST VALUES OF 15 MICRON PET

<u>Char/test method</u>	<u>unit</u>	<u>measured value</u>
Avg.Thickness/Internal method	mic	15.06
Haze/ASTM-D 1003	%	4.05
Shrinkage-MD/ASTM-D1204	%	2.00
Shrinkage-TD/ASTM-D1204	%	0
Tensile St-MD/ASTM-D882	Kg/cm ²	23.10
Tensile St-TD/ASTM-D882	Kg/cm ²	23.80
Elongation-MD/ASTM-D882	%	122
Elongation-TD/ASTM-D882	%	102
Melting point	Degree Celsius	250

www.rasikfoils.com

141Kms,Delhi-Agra bypass road,Near alwar railway bridge,Krishna nagar,Mathura (U.P),India 281004
Phone +91-565-2423365 Mobile +91-9927022764